


VENTANA™

FP8032SB-220 Ceiling Fan

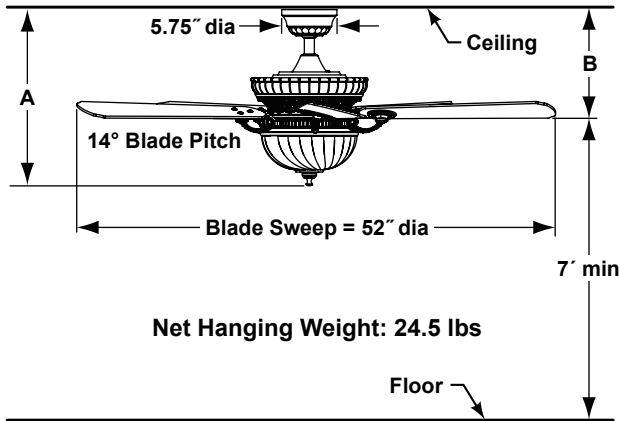

INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 220~240 volts AC, 50 Hz, 5 amp circuit.

MOTOR SPECS:

172 x 17-220 motor is designed for optimal performance with this fan.

BLADE SETS:

A set of five 20.7" reversible mahogany/walnut wood blades is included.

CONTROL OPTIONS:

TR4WH-220 hand-held remote control is included. Push button remote control has 3 fan speeds, infinite light levels and off button. Optional C2-220 and C6-220 wall controls are available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

Three-bulbs (40-watt G-50 light bulbs -included) downlight fixture is included with this fan assembly. Maximum downlight wattage not to exceed 120 watts.

DOWNROD OPTIONS:

The Ventana™ fan comes with a 1" Dia. x 4.5" downrod. Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer downrod, a downrod coupler is available. The Ventana™ fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 4.5" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for up to 52°. Optional close-to-ceiling kit is available as well—sold separately. Call your local dealer for more information.

LOCATION USE:

Fan is rated for dry locations only.

	A	B
Fan w/4.5" downrod	18.38"	10.59"
Fan w/12" downrod	25.88"	18.09"
Fan w/18" downrod	31.88"	24.09"
Fan w/24" downrod	37.88"	30.09"
Fan w/36" downrod	49.88"	42.09"
Fan w/48" downrod	61.88"	54.09"
Fan w/60" downrod	73.88"	66.09"
Fan w/72" downrod	85.88"	78.09"

Available Finish

SB	Sedona Beige with Amber Tea glass
----	-----------------------------------

TUV/GS Efficiency Info (220V)

Fan Speed	Max RPM	Amps	Watts
High	148	0.37	65
Med	98	0.30	31
Low	50	0.22	12