




**BECKWITH™**

**FP7964\*\*  
23" Ceiling Fan**

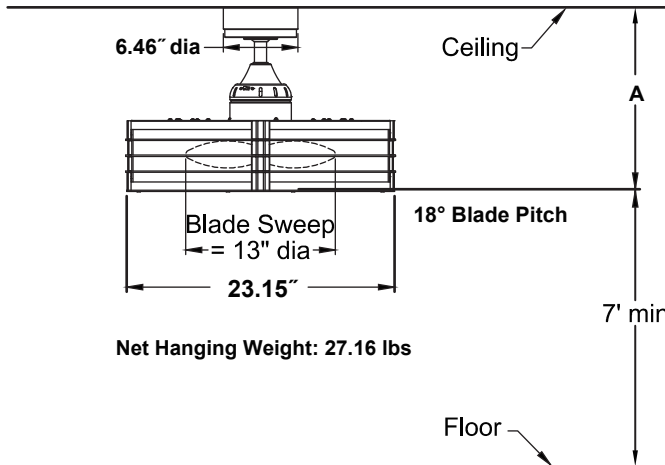

	<b>A</b>
Fan w/4.5" downrod	15.96"
Fan w/12" downrod	23.46"
Fan w/18" downrod	29.46"
Fan w/24" downrod	35.46"
Fan w/36" downrod	47.46"
Fan w/48" downrod	59.46"
Fan w/60" downrod	71.46"
Fan w/72" downrod	83.46"

<b>Available Finishes</b>	
OB	Oil-rubbed Bronze with Black Blade and Opal White Shade
BN	Brushed Nickel with Aluminum Blade and Opal White Shade

**INSTALLATION REQUIREMENTS:**

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

**ELECTRICAL REQUIREMENTS:**

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

**MOTOR SPECS:**

82 x 25 motor is designed for optimal performance with this fan.

**CONTROL OPTIONS:**

TR24WH hand-held remote control with wall mount is included. Push button remote control has 3 fan speeds, infinite light levels and off button. Optional CWRL4 and C25 wall controls, CRL4WH and CRL8TS hand-held remote controls are available—sold separately. Instructions are provided with each control.

**LIGHTING OPTIONS:**

Four 43-watt E12 halogen candelabra base bulbs included.

**DOWNROD OPTIONS:**

Fan comes with 1" dia. x 4.5" long downrod (DR1-45). Optional downrods available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling upto 30°. Most sloped ceiling installations require a downrod longer than the standard 4.5" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 30° and up to 52°. Optional close-to-ceiling kit is available as well—sold separately. Call technical support for more information.

**LOCATION USE:**

Fan is rated for dry location only.

<b>Airflow / Energy Efficiency Info (120V)</b>					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	1230	1009	16	0.53	63
Med	1075	832	17	0.52	49
Low	635	851	40	0.39	21