

Sandella®

FP1820 Series



Select Finishes

SPECIFICATION SHEET





celebrating 25 years

Product Specifications subject to change

SANDELLA®

FP1820** Ceiling Fan

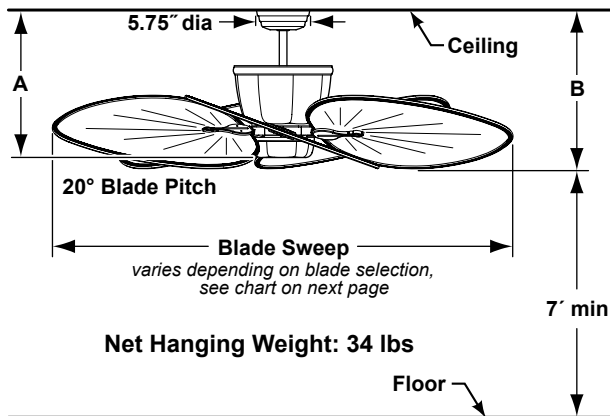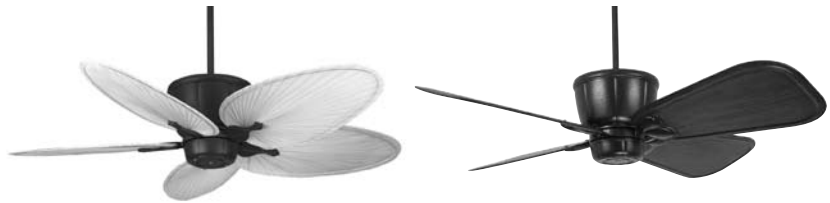

	A	B*
Fan w/6" downrod	16.00"	17.00"
Fan w/12" downrod	24.00"	23.00"
Fan w/18" downrod	30.00"	29.00"
Fan w/24" downrod	36.00"	35.00"
Fan w/36" downrod	48.00"	47.00"
Fan w/48" downrod	60.00"	59.00"
Fan w/60" downrod	72.00"	71.00"
Fan w/72" downrod	84.00"	83.00"

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

FK2100 motor is designed for optimal performance with this fan. 220 VAC, 50 Hz export version available.

BLADES:

A variety of 4- and 5-blade sets are available—sold separately. 5-blade sets are available in palm, bamboo, wood and composite materials. 4-blade sets are made of wood and will increase speed and airflow. Traditional blade holders (5-blade) and wood blade holders (4-blade) are included. See our catalog or visit www.fanimation.com for blade options.

Note: Fan speeds will vary according to blade set—material, shape and size of blade. In general, smaller blades will turn faster than bigger ones and narrower blades will turn faster than wider ones.

CONTROL OPTIONS:

C22 hand-held remote control and C23 wall control (white faceplate included) with receiver unit (P2550) are included. Push-button control has 3 speeds, reverse, up/downlight controls and off button. C2-220 wall control is included with 220V models. Instructions are provided with each control.

LIGHTING OPTIONS:

3-bulb decorative upright fixture with three 40-watt candelabra bulbs is included. Maximum downlight wattage is not to exceed 120 watts. See our catalog or visit www.fanimation.com for available downlight options.

DOWNROD OPTIONS:

Fan comes with a 1/2" dia. x 6" long downrod (DR6). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB52) are available for slope angles greater than 30° and up to 52°. Call technical support for more information.

LOCATION USE:

Fan is dry location rated when used with natural palm or wood blades. Damp location rated with use of woven bamboo or all-weather composite blades.

Available Finishes

OB	Oil-rubbed bronze (Damp)
RS	Rust (Damp)
SN	Satin Nickel (Damp)

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	140	4792	58	0.70	83
Med	91	2976	75	0.47	40
Low	59	1673	89	0.31	19

BLADE SWEEP INFORMATION

Use the charts below to determine blade sweep.

5-Blade Fans		
Blade	Blade Length	Blade Sweep
<i>Palm Leaf (Dry Location Only)</i>		
ISP2, ISP5	18"	44"
ISP1, ISP4, ISP1RB, ISP4RB	22"	52"
<i>Woven Bamboo (Dry and Damp Locations Only)</i>		
ISD2A	18"	44"
ISD1A, ISD4A, ISD7A, ISD1C, ISD4C, ISD7C	22"	52"
<i>Wood (Dry Location Only)</i>		
B6030CY, B6030MH, B6030MP, B6030TK	30"	68"
B6000CY, B6000MH, B6000MP, B6000TK	36"	80"
<i>All-Weather Composite (Dry, Damp and Wet Location)</i>		
BPD5A	18"	44"
BPW20CY, BPW20MH, BPW20TK	20"	48"
BPW10CY	20.5"	49"
BPD1A, BPD4A, BPD4BL, BPD4MW, BPP1, BPP4, BPP1BR, BPD4BR, BPP4GR	22"	52"

4-Blade Fans		
Blade	Blade Length	Blade Sweep
<i>Wood (Dry Location Only)</i>		
B4010CP, B4020SS, B4040CP	22"	52"
B4000CA	26"	60"
B4060CP	36"	80"



celebrating 25 years

**10983 Bennett Parkway
Zionsville, IN 46077**

Toll Free (888) 567-2055

FAX (866) 482-5215

Outside U.S. call (317) 733-4113

Visit Our Website @ www.fanimation.com

*Copyright 2010 Fanimation, Inc.
All Rights Reserved*



2010/01