

Sandella[®]

FP1820 Series



Select Finishes


SPECIFICATION SHEET



celebrating 25 years

Product Specifications subject to change

Sandella® Fan Assembly – FP1820**

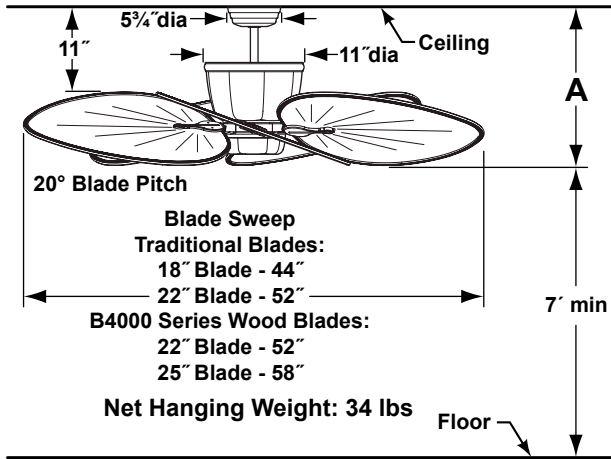

** Available Finishes	
AB	Antique Brass
OB	Oil-Rubbed Brz (Damp)
RS	Rust (Damp)
SN	Satin Nickel

Distance from Ceiling to Edge of Blade	A
Fan w/6" downrod	17"
Fan w/12" downrod	23"
Fan w/18" downrod	29"
Fan w/24" downrod	35"
Fan w/36" downrod	47"
Fan w/48" downrod	59"
Fan w/60" downrod	71"
Fan w/72" downrod	83"

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	140	4792	58	0.70	83
Med	91	2976	75	0.47	40
Low	59	1673	89	0.31	19

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

FK2100 motor is designed for optimal performance with this fan. 220 VAC, 50 Hz export version available.

FAN SPEEDS:

Material, shape and size of fan blade will affect fan speed. In general, smaller blades will turn faster than larger ones and narrower blades will turn faster than the wider ones.

BLADES:

A variety of 4- and 5-blade sets are available—sold separately. 5-blade sets are available in palm, bamboo, wood and composite materials. 4-blade sets are made of wood and will increase speed and airflow. Traditional blade holders (5-blade) and wood blade holders (4-blade) are included. See our catalog or visit www.fanimation.com for blade options.

CONTROL OPTIONS: C22 hand-held remote control and C23 wall control (white faceplate included) with receiver unit (P2550) are included. Push-button control has 3 speeds, reverse, up/down light controls and off button. C2-220 wall control is included with 220V models. Instructions are provided with each control.

LIGHTING OPTIONS:

3-bulb decorative uplight fixture with three 40-watt candelabra bulbs is included. Maximum downlight wattage is not to exceed 120 watts. See our catalog or visit www.fanimation.com for available downlight options.

DOWNROD OPTIONS:

Fan comes with a 1/2" dia. x 6" long downrod (DR6). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB52) are available for slope angles greater than 30° and up to 52°. Call technical support for more information.

LOCATION USE:

Fan is dry location rated only, except where (Damp) is noted next to above listed finish codes.



**10983 Bennett Parkway
Zionsville, IN 46077
Toll Free (888) 567-2055
FAX (866) 482-5215**

