Louvre®

FP1320 Series

DAMP

Select Finishes

SPECIFICATION SHEET

FANIMATION®

celebrating 25 years

Product Specifications subject to change

LOUVRE®

FP1320**
Ceiling Fan

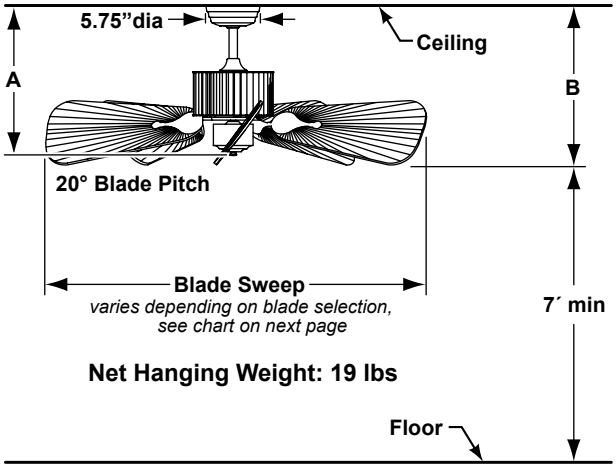

Net Hanging Weight: 19 lbs

**Dimension when used with BPD4A blades. Ceiling to blade measurement will vary depending on blade.*

	A	B*
Fan w/6″ downrod	16.08″	15.00″
Fan w/12″ downrod	22.08″	21.00″
Fan w/18″ downrod	28.08″	27.00″
Fan w/24″ downrod	34.08″	33.00″
Fan w/36″ downrod	46.08″	45.00″
Fan w/48″ downrod	58.08″	57.00″
Fan w/60″ downrod	70.08″	69.00″
Fan w/72″ downrod	82.08″	81.00″

Available Finishes	
PW	Pewter
RS	Rust **(Damp)**

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	141	4788	58	0.69	82
Med	91	2944	77	0.47	38
Low	43	957	101	0.23	10

INSTALLATION REQUIREMENTS:
Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:
Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:
FK2100 motor is designed for optimal performance with this fan. 220 VAC, 50 Hz export version available in standard finishes.

BLADES:
A variety of 4- and 5-blade sets are available. 5-blade sets are available in palm, bamboo, wood and composite materials. 4-blade sets are made of wood and require the use of BH20 series blade holders (not included). 4-blade sets will increase speed and airflow. See our catalog or visit www.fanimation.com for blade options.

Note: Fan speeds will vary according to blade set—material, shape and size of blade. In general, smaller blades will turn faster than bigger ones and narrower blades will turn faster than wider ones.

CONTROL OPTIONS:
Optional C1 and C2 wall controls available—sold separately. Optional C20 remote control and C21 wall control available with use of optional SW50 switch cap receiver—all sold separately. Instructions are provided with each control. Optional wall control (C1-220) is available for 220V models—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:
Optional lighting fitters and light kits are available. See our catalog or visit www.fanimation.com for available lighting options.

DOWNROD OPTIONS:
Fan comes with a ½″ dia. x 6″ long downrod (DR6). Optional downrods are available in 12″, 18″, 24″, 36″, 48″, 60″ and 72″ lengths. A downrod coupler is available for installations requiring a downrod longer than 72″. The Islander® fan can be mounted on a sloped ceiling up to 30°. Optional sloped ceiling kits are available for up to 52°. Call technical support for more information.

LOCATION USE:
Fan is dry location rated only. Damp location rated with use of rust finish fan assembly and woven bamboo or all-weather composite blades.

BLADE SWEEP INFORMATION

Use the charts below to determine blade sweep.

5-Blade Fans		
Blade	**Blade Length**	**Blade Sweep**
Palm Leaf (Dry Location Only)		
ISP2, ISP5	18″	44″
ISP1, ISP4, ISP1RB, ISP4RB	22″	52″
Woven Bamboo (Dry and Damp Locations Only)		
ISD2A	18″	44″
ISD1A, ISD4A, ISD7A, ISD1C, ISD4C, ISD7C	22″	52″
Wood (Dry Location Only)		
B6030CY, B6030MH, B6030MP, B6030TK	30″	68″
B6000CY, B6000MH, B6000MP, B6000TK	36″	80″
All-Weather Composite (Dry, Damp and Wet Location)		
BPD5A	18″	44″
BPW20CY, BPW20MH, BPW20TK	20″	48″
BPW10CY	20.5″	49″
BPD1A, BPD4A, BPD4BL, BPD4MW, BPP1, BPP4, BPP1BR, BPD4BR, BPP4GR	22″	52″

4-Blade Fans		
Blade	**Blade Length**	**Blade Sweep**
Wood (Dry Location Only)		
B4010CP, B4020SS, B4040CP	22″	52″
B4000CA	26″	60″
B4060CP	36″	80″

10983 Bennett Parkway
Zionsville, IN 46077
Toll Free (888) 567-2055
FAX (866) 482-5215
Outside U.S. call (317) 733-4113
Visit Our Website @ www.fanimation.com

Copyright 2010 Fanimation, Inc.
All Rights Reserved

2010/01