


# **The Tropicana<sup>®</sup>**

## **FP1620NO**




# **SPECIFICATION SHEET**

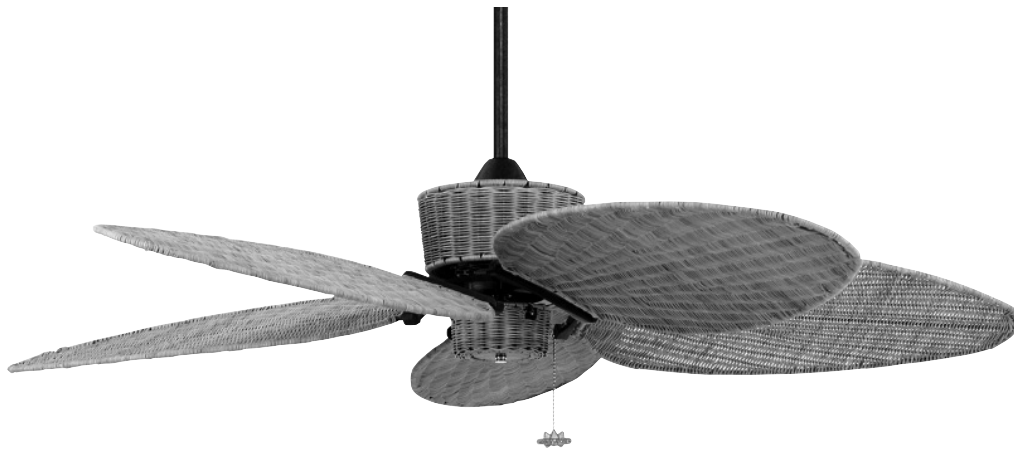

*Product Specifications subject to change*

# The Tropicana® Fan Assembly – FP1620NO

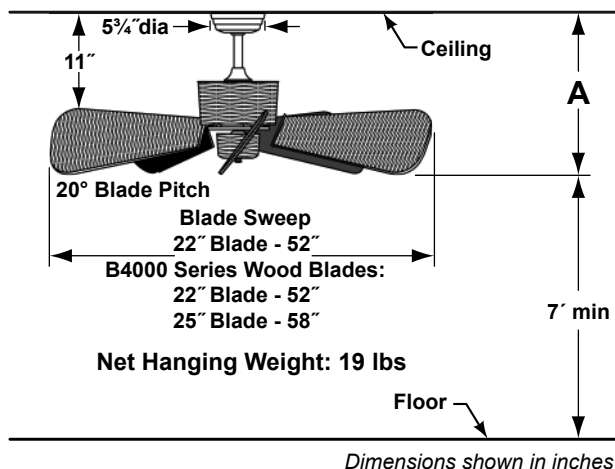

Distance from Ceiling to Edge of Blade	A
Fan w/6" downrod	15"
Fan w/12" downrod	21"
Fan w/18" downrod	27"
Fan w/24" downrod	33"
Fan w/36" downrod	45"
Fan w/48" downrod	57"
Fan w/60" downrod	69"
Fan w/72" downrod	81"

Model No.	Trim Finish	Wicker Finish	Blade Shape
FP1620NO	Rust	Natural	Narrow Oval
FP1620NO-220	Rust	Natural	Narrow Oval

## INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 50 lbs.

## ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit. 220 VAC, 50 Hz version is available.

## FAN SPEEDS:

3 fan speeds with reversing switch (on switch cup housing). 1st pull - High = 70 rpm; 2nd pull - Medium = 40 rpm; 3rd pull - Low = 25 rpm.

## CONTROL OPTIONS:

Optional controls are: C1 or C2 wall controls; C4 remote control with canopy receiver; SW50 switch cap receiver with C20 remote and/or C21 wall control.

## LIGHTING OPTIONS:

Optional lighting fitters and light kits are available, including a single bowl fixture with a maximum of 180 watts and a variety of four-light fixtures with a maximum of 240 watts. See catalog or visit our website, [www.fanimation.com](http://www.fanimation.com) for more lighting options.

## DOWN ROD OPTIONS:

The Tropicana® fan comes with a standard 6" down rod. Optional down rods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer down rod, a down rod coupler is available. The Tropicana® fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a down rod longer than the standard 6" down rod. Optional sloped ceiling kits are available for up to 52°. Call tech support for more information.

## BLADE SETS:

A set of 5 wicker blades are included with this fan. Mounting four blades is an option.

## DAMP LOCATION:

Fan rated for Damp Location usage.



10983 Bennett Parkway  
Zionsville, IN 46077  
Toll Free (888) 567-2055  
FAX (866) 482-5215

Outside U.S. call (317) 733-4113

Visit Our Website [www.fanimation.com](http://www.fanimation.com)

