The Air Shadow™

FP8250B – Traditional

SPECIFICATION SHEET

FANIMATION®

celebrating 25 years

Product Specifications subject to change

AIR SHADOW™ SERIES

FP825OB Traditional Ceiling Fan Assembly

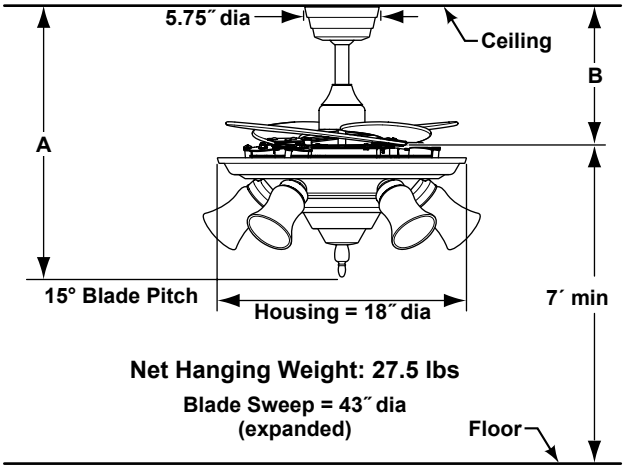

Glass shades not included

	A	B
Fan w/6″ downrod	21.00″	10.90″
Fan w/12″ downrod	27.00″	16.90″
Fan w/18″ downrod	33.00″	22.90″
Fan w/24″ downrod	39.00″	28.90″
Fan w/36″ downrod	51.00″	40.90″
Fan w/48″ downrod	63.00″	52.90″
Fan w/60″ downrod	75.00″	64.90″
Fan w/72″ downrod	87.00″	76.90″

Available Finish	
OB	Oil-rubbed bronze with cherry wood blades

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	267	4514	87	0.40	48
Med	220	3696	103	0.38	35
Low	168	2776	127	0.33	22

INSTALLATION REQUIREMENTS:
Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:
Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:
188 x 18 motor is designed for optimal performance with this fan.

BLADES:
A set of four cherry finish wood blades included.

CONTROL OPTIONS:
C28 hand-held reversible remote control with canopy-style receiver unit (RECCAN57DEMO) included. Frequency code settings are located in both transmitter and receiver units. Push-button remote has 3 reversible fan speeds, infinite light level dimming, demo mode and off button. Demo mode is initiated by pressing the Demo button on the remote. Lights will flash 3 times when demo mode is initiated and fan runs for 2½ minutes, then shuts off for ½ minute. Demo mode continues until any other button is pressed on the remote control. Optional C21 wall control is available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:
Includes LK825OB traditional downlight housing and five 25-watt candelabra bulbs. 2¼″ glass shades are not included or required. See our catalog or visit www.fanimation.com for glass shade selections.

DOWNROD OPTIONS:
Fan comes with a 1″ dia. x 6″ long downrod (DR1-6). Optional downrods are available in 12″, 18″, 24″, 36″, 48″, 60″ and 72″ lengths. Fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6″ downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 30° and up to 52°. Call technical support for more information.

LOCATION USE:
Fan is rated for dry locations only.

10983 Bennett Parkway
Zionsville, IN 46077
Toll Free (888) 567-2055
FAX (866) 482-5215
Outside U.S. call (317) 733-4113
Visit Our Website @ www.fanimation.com

Copyright 2010 Fanimation, Inc.
All Rights Reserved

2010/01