

The Bayhill™

Collection Series Fans




SPECIFICATION SHEET



Product Specifications subject to change

LB250VZ Fan Assembly

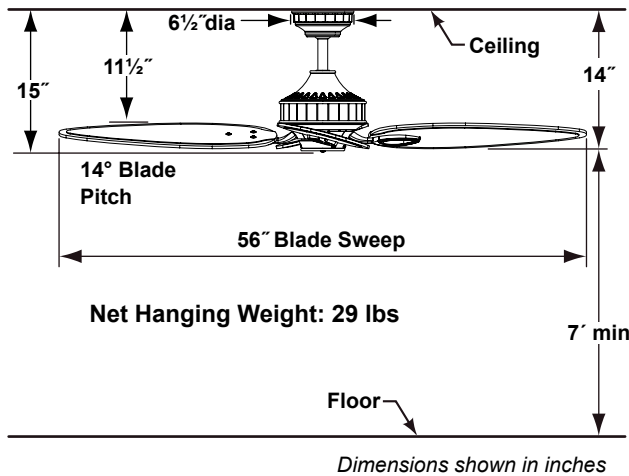

Fan Assembly Includes:

- Fan Motor Assembly with Decorative Housing and Canopy
- Cairo Purple Wood Blades

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	186	6471	88	0.62	73
Med-High	124	4218	119	0.43	36
Med	87	2844	151	0.31	19
Low	46	1224	183	0.18	7

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

188 x 25 motor is designed for optimal performance with this fan.

BLADES:

A set of four cairo purple wood blades is included.

CONTROL OPTIONS:

C27 3-wire wall control is included. Wall control unit has 4 speeds and infinitely varying down light controls. Optional C4 remote control with canopy-style receiver unit is available—sold separately. Instructions are provided with each control.


DOWNROD OPTIONS:

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods available in 12", 18", 24", 36", 48", 60" and 72" lengths. Fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 30° and up to 52°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry locations only.

LB230VZ Fan Assembly

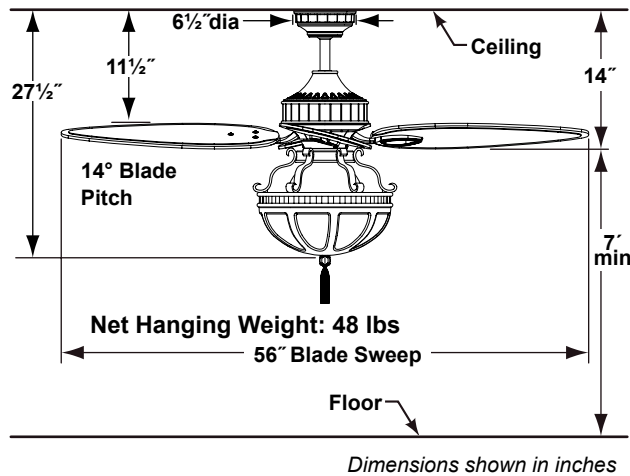

Fan Assembly Includes:

- Fan Motor Assembly with Decorative Housing and Canopy
- Cairo Purple Wood Blades
- Dual Glass Bowl Light Kit Assembly with Tassel

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	186	6471	88	0.62	73
Med-High	124	4218	119	0.43	36
Med	87	2844	151	0.31	19
Low	46	1224	183	0.18	7

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

188 x 25 motor is designed for optimal performance with this fan.

BLADES:

A set of four cairo purple wood blades is included.

CONTROL OPTIONS:

C27 3-wire wall control is included. Wall control unit has 4 speeds and infinitely varying down light controls. Optional C4 remote control with canopy-style receiver unit is available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

Dual amber glass bowl light kit with three 40-watt candelabra bulbs is included. Maximum downlight wattage is not to exceed 120 watts.


DOWNROD OPTIONS:

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods available in 12", 18", 24", 36", 48", 60" and 72" lengths. Fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 30° and up to 52°. Call technical support for more information.

LOCATION USE:

Fan is dry location rated only.

LB270VZ Fan Assembly

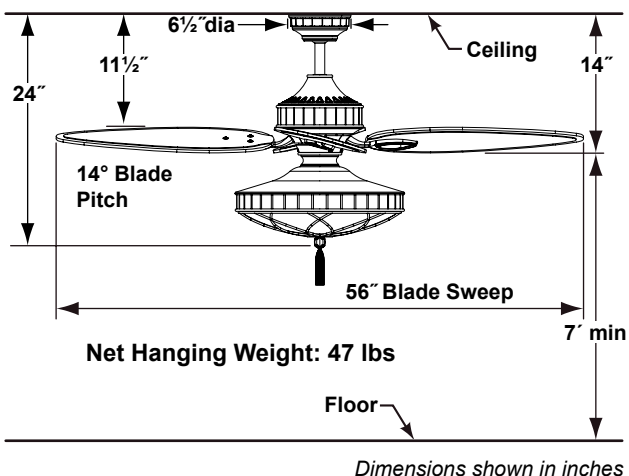

Fan Assembly Includes:

- Fan Motor Assembly with Decorative Housing and Canopy
- Cairo Purple Wood Blades
- Filigree Glass Bowl Light Kit Assembly with Tassel

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	186	6471	88	0.62	73
Med-High	124	4218	119	0.43	36
Med	87	2844	151	0.31	19
Low	46	1224	183	0.18	7

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

188 x 25 motor is designed for optimal performance with this fan.

BLADES:

A set of four cairo purple wood blades is included.

CONTROL OPTIONS:

C27 3-wire wall control is included. Wall control unit has 4 speeds and infinitely varying down light controls. Optional C4 remote control with canopy-style receiver unit is available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

Amber glass bowl kit with decorative filigree and three 40-watt candelabra bulbs is included. Maximum downlight wattage is not to exceed 120 watts.

DOWNROD OPTIONS:

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods available in 12", 18", 24", 36", 48", 60" and 72" lengths. Fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 30° and up to 52°. Call technical support for more information.

LOCATION USE:

Fan is dry location rated only.



**10983 Bennett Parkway
Zionsville, IN 46077**

Toll Free (888) 567-2055

FAX (866) 482-5215

Outside U.S. call (317) 733-4113

Visit Our Website www.fanimation.com



Copyright 2009 Fanimation, Inc.

2008/01