CHANGE FOR THE BETTER WITH ENERGY STAR

AireDécor By Fanimation®

BP200**1 Series Ceiling Fans

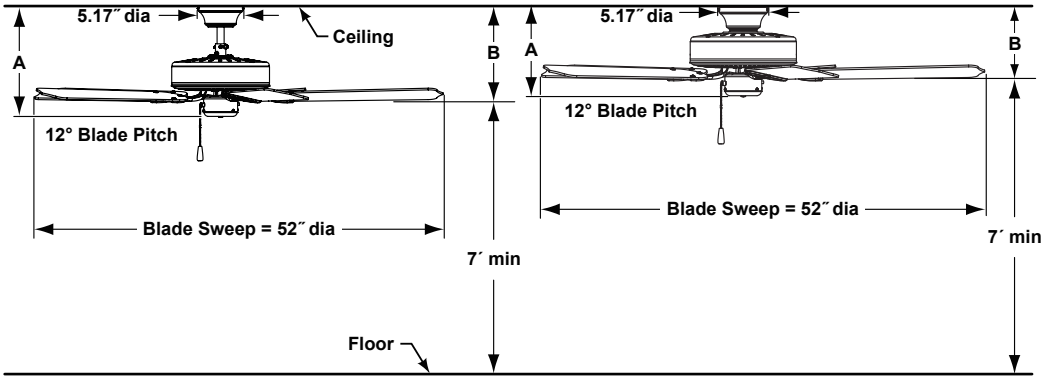

Net Hanging Weight: 16.31 lbs

	A	B
Fan In Close to Ceiling Configuration	9.63″	7.74″

	A	B
Fan w/4.5″ downro	13.20″	11.10″
Fan w/12″ downrod	20.70″	18.60″
Fan w/18″ downrod	26.70″	24.60″
Fan w/24″ downrod	32.70″	30.60″
Fan w/36″ downrod	44.70″	42.60″
Fan w/48″ downrod	56.70″	54.60″
Fan w/60″ downrod	68.70″	66.60″
Fan w/72″ downrod	80.70″	78.60″

INSTALLATION REQUIREMENTS:
Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:
Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:
153 x 15 motor is designed for optimal performance with this fan. Fan is Energy Star Rated.

BLADES:
A set of five 20.7″ traditional wood blades is included.

Available Finishes	
Fan / Housing Assembly	**Blades - Traditional**
MW – Matte white	Matte white
OB – Oil-rubbed bronze	Cherry / walnut reversible
SN – Satin nickel	Cherry / walnut reversible

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	188	5897	92	0.53	64
Med	124	3701	128	0.37	29
Low	65	1744	174	0.21	10

CONTROL OPTIONS:
Optional CW1, CW1SW, CW2, CW5 and CWRL4 wall controls and CRL4WH and CRL8TS remote controls (with receiver units) are available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:
Optional lighting fitters and light kits are available. See our catalog or visit www.fanimation.com for available lighting options.

DOWNROD OPTIONS:
Dual mount for flush mount application or 1″ dia x 4.5″ long downrod. Optional downrods available in 12″, 18″, 24″, 36″, 48″, 60″, and 72″ lengths. A downrod coupler is available for installations requiring a downrod longer than 72″. Fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6 ″ downrod. Call technical support for more information.

LOCATION USE:
Series fans are rated for dry locations only.