
TORRENTO®

FP920** Wet Location Fan



Available Finishes	
AZ	Aged bronze

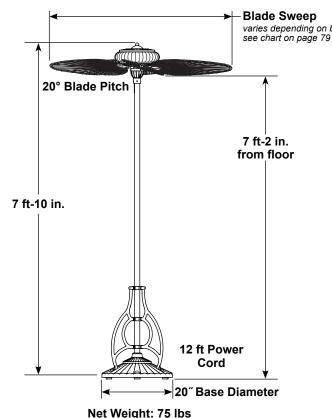

Fits Most Umbrellas	20" Diameter				
Optional Table Accessory					
TA92AZ	Aged bronze				

Available All-Weather Composite Blades			
Palm leaf	BPP1	Natural - 22" wide oval	
Palm leaf-brown	BPP1BR	Painted - 22" wide oval	
Palm leaf	BPP4	Natural - 22" narrow oval	
Palm leaf-brown	BPP4BR	Painted - 22" narrow oval	
Palm leaf-green	BPP4GR	Painted - 22" narrow oval	
Woven bamboo	BPD1A	Antique - 22" wide oval	
Woven bamboo	BPD4A	Antique - 22" narrow oval	
Woven bamboo	BPD4MW	Matte white - 22" narrow oval	
Traditional wood	BPW10CY	Cherry - 20" narrow	

INSTALLATION REQUIREMENTS:

Base of fan must be secured to floor using three 3/8"-7/16" lag screws for wood floor applications or 3/8"-7/16" lag bolt/ lag shields for concrete floor applications. Lag screws, lag bolts and lag shields included.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit with ground fault protection. 12 ft power cord with 3-prong plug is included. Can be hard-wired directly to "weather-tight" junction box.

MOTOR SPECS:

188 x 25 motor is designed for optimal performance with this fan.

FAN SPEED:

3-speed pull-chain with reversing switch (on the motor). Approximate speeds (depending on blade selection) High—112 rpm; Med—88 rpm; Low—67 rpm.

BLADES:

All-weather composite, palm, bamboo, and wood blade sets are available—sold separately. See our catalog or visit www. fanimation.com for blade options.

LOCATION USE:

Fan is rated for dry, damp and wet locations.