


# The Palisade<sup>®</sup>

**FP240 Series**

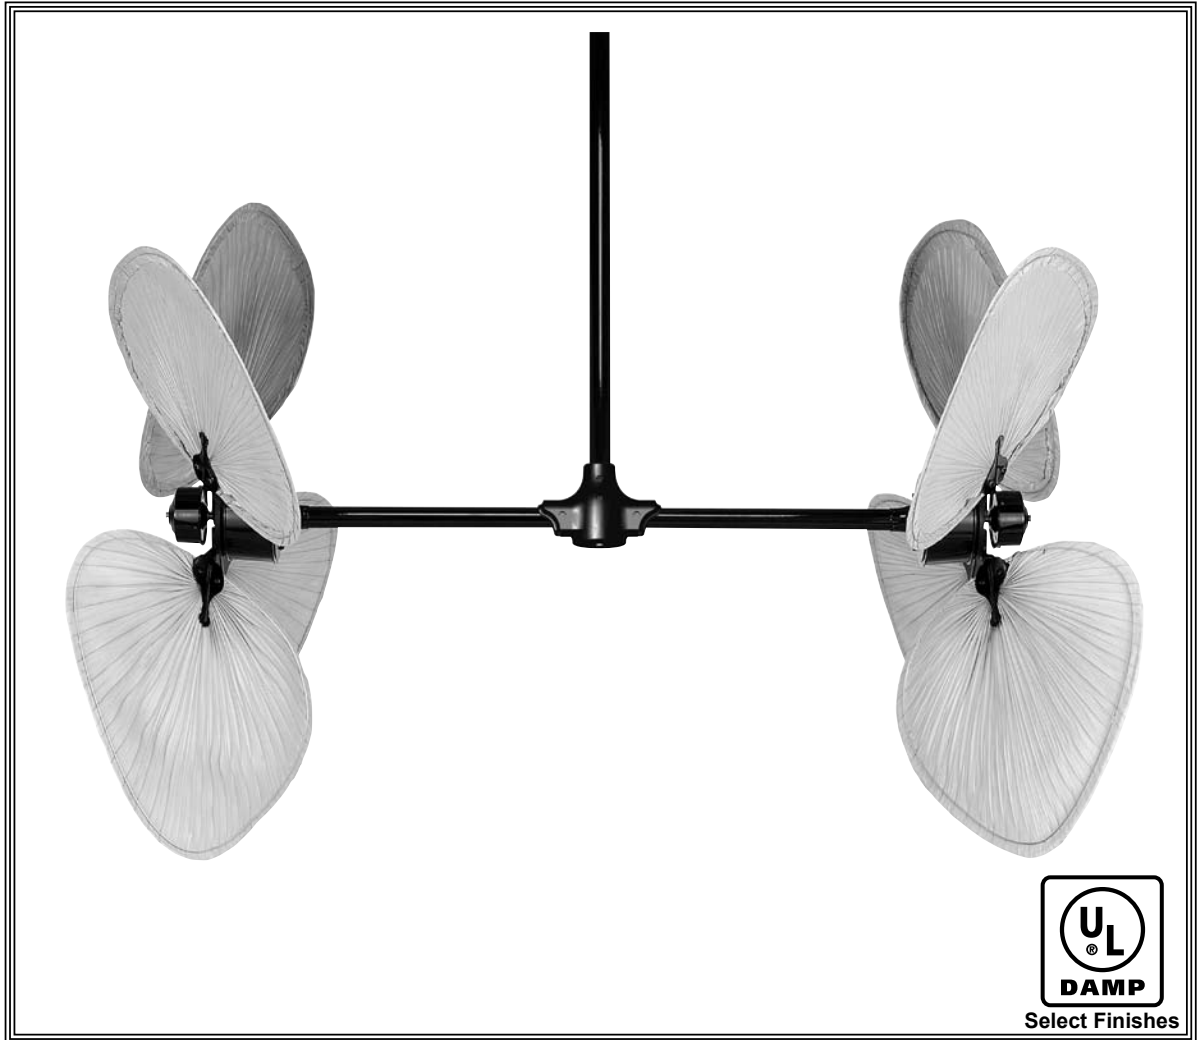

Select Finishes


## **SPECIFICATION SHEET**



celebrating 25 years

*Product Specifications subject to change*

# The Palisade® Fan Assembly – FP240\*\*

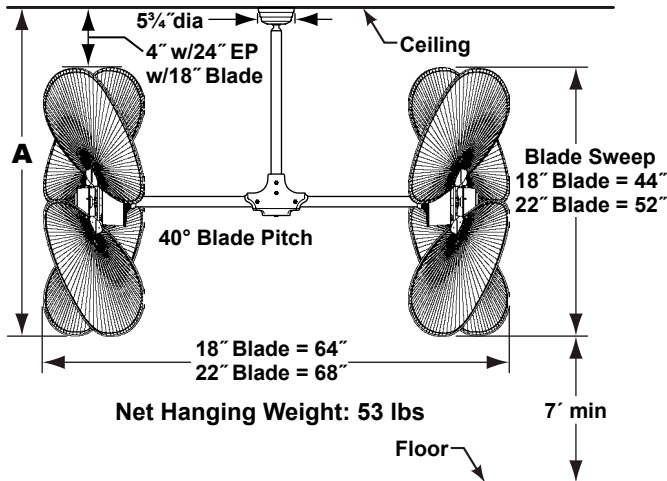

Dimensions shown in inches

Available Finishes	
AB	Antique Brass
OB	Oil-Rubbed Bronze (Damp)
PW	Pewter
RS	Rust (Damp)

Component Weights	
Motor Assembly Unit (2)	14 lbs
Horizontal Tube Assembly	5 lbs
Blade Set (8) <sup>†</sup>	3-5 lbs
Extension Pole <sup>†</sup>	1 lb/ft

<sup>†</sup>Sold Separately

Distance from Ceiling to Bottom of Blades	A
*24" Pole w/18" Palm Blades	51"
30" Pole w/22" Palm Blades	61"
36" Pole w/22" Palm Blades	67"
48" Pole w/22" Palm Blades	79"
60" Pole w/22" Palm Blades	91"
72" Pole w/22" Palm Blades	103"

\* 24" Extension Pole may be used with 18" blades only

\* Can be mounted on a sloped ceiling up to 45°

## INSTALLATION REQUIREMENTS:

Fan uses a ball and bracket hanging system; must be secured to a structural member, such as a ceiling joist, capable of withstanding a load of at least 100 lbs. A 3/8" x 5" long lag bolt passes through loop in ceiling support cable, hanger bracket plate, and into wood structural member above.

## ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

## MOTOR SPECS:

Two FK2100 motors are designed for optimal performance with this fan. 220 VAC, 50 Hz export version available.

## FAN SPEEDS:

High—50 rpm; Low—30 rpm

## BLADES:

A variety of palm, bamboo, and wood blades are available—sold separately; see our catalog or visit [www.fanimation.com](http://www.fanimation.com).

## CONTROL OPTIONS:

C3 wall control is included. Optional C24 remote control and C25 wall control are available with use of optional SW24 receiver unit—all sold separately. Instructions are provided with each control.

## LIGHTING OPTIONS:

Optional lighting fitters and light kits are available. See our catalog or visit [www.fanimation.com](http://www.fanimation.com) for available lighting options.

## EXTENSION POLE:

Fan requires the use of an extension pole—sold separately. Extension poles available in 24", 30", 36", 48", 60" and 72" lengths. An extension pole coupler is available for installations requiring an extension pole longer than 72". Fan can be mounted on a sloped ceiling up to 30°. Optional sloped ceiling ball kit (SCB52) is available for slope angles greater than 30° and up to 52°.

## ACCESSORY OPTIONS:

Various optional accessories are available; see our catalog or visit [www.fanimation.com](http://www.fanimation.com).

## LOCATION USE:

Fan is dry location rated only, except where (Damp) is noted next to above listed finish codes.



10983 Bennett Parkway  
Zionsville, IN 46077  
Toll Free (888) 567-2055  
FAX (866) 482-5215

Outside U.S. call (317) 733-4113

Visit Our Website [www.fanimation.com](http://www.fanimation.com)

