


**CAMHAVEN™**

**FP8095\*\*  
Ceiling Fan**

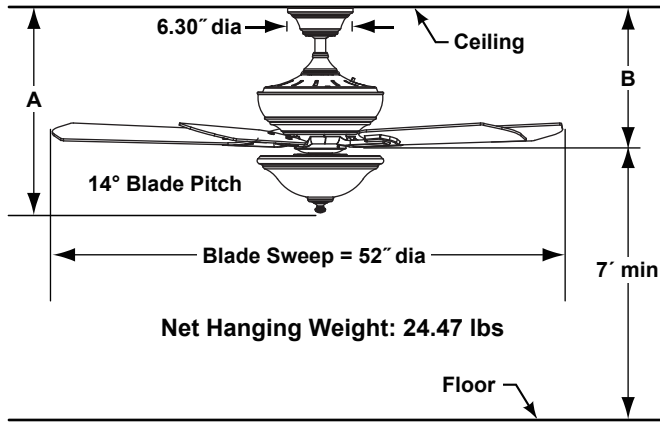

	A	B
Fan w/4.5" downrod	19.76"	13.44"
Fan w/12" downrod	27.26"	20.94"
Fan w/18" downrod	33.26"	26.94"
Fan w/24" downrod	39.26"	32.94"
Fan w/36" downrod	51.26"	44.94"
Fan w/48" downrod	63.26"	56.94"
Fan w/60" downrod	75.26"	68.94"
Fan w/72" downrod	87.26"	80.94"

**INSTALLATION REQUIREMENTS:**

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 35 lbs.

**ELECTRICAL REQUIREMENTS:**

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

**MOTOR SPECS:**

172 x 17 AC motor is designed for optimal performance with this fan.

**BLADE SETS:**

A set of five 20" reversible Plywood blades is included.

**CONTROL OPTIONS:**

TR24WH hand-held remote control with wall mount is included. Push button remote control has 3 fan speeds, infinite light levels and off button. Optional CW1SW, CW2, C25, CWRL4 and CW60WH wall controls, BTCR9, C4, CRL4WH and CRL8TS hand held remote controls with receiver unit available, BTT9 hand held remote and BTR9 receiver are available—sold separately. Instructions are provided with each control.

**LIGHTING OPTIONS:**

Two 75-watt halogen minican bulbs included. See our catalog or visit [www.fanimation.com](http://www.fanimation.com) for available lighting options.

**DOWNROD OPTIONS:**

Fan comes with 1" dia. x 4.5" long downrod (DR1-45). Optional downrods available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". The fan can be mounted on a sloped ceiling up to 27°. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Optional close-to-ceiling kit is available as well—sold separately. Call technical support for more information.

**LOCATION USE:**

Fan is rated for dry location only.

Available Finishes		
Fan / Housing Assembly		Blade
BA	Bronze Accent	Cherry/Walnut with Frosted White Glass
OB	Oil-rubbed Bronze	Cherry/Walnut with Frosted White Glass
PW	Pewter	Cherry/Walnut with Frosted White Glass
WH	White	White with Frosted White Glass

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	188	5813	87	0.56	67
Med	111	3419	135	0.43	25
Low	48	1497	176	0.27	9

Energy Guide FTC			
Power (W <sub>ave</sub> )	Total Air Delivery (CFM <sub>ave</sub> )	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
42	3668	12	87

Light Bulb Information (120V)					
Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
Halogen Minican	75	2	2062	2756	99%