




BP210B**1 Series Ceiling Fans

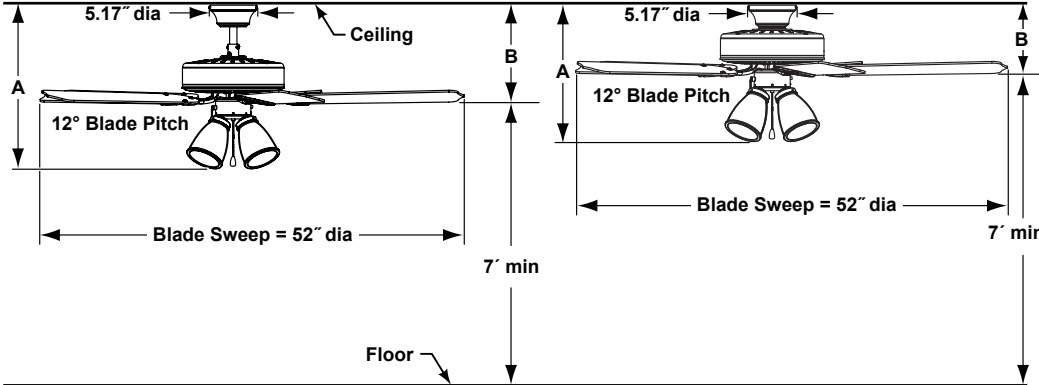

Net Hanging Weight: 19.10 lbs

| | A | B |
|---------------------------------------|--------|-------|
| Fan In Close to Ceiling Configuration | 15.06" | 7.74" |

| | A | B |
|--------------------|--------|--------|
| Fan w/4.5" downrod | 18.70" | 11.10" |
| Fan w/12" downrod | 26.20" | 18.60" |
| Fan w/18" downrod | 32.20" | 24.60" |
| Fan w/24" downrod | 38.20" | 30.60" |
| Fan w/36" downrod | 50.20" | 42.60" |
| Fan w/48" downrod | 62.20" | 54.60" |
| Fan w/60" downrod | 74.20" | 66.60" |
| Fan w/72" downrod | 86.20" | 78.60" |

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

153 x 15 AC motor is designed for optimal performance with this fan.

BLADES:

A set of five 21" traditional wood blades is included.

CONTROL OPTIONS:

Optional CWRL4**, WC2WH and WR501WH wall controls are available—sold separately. Optional BTCR9, CRL4WH and CR500 remote controls with receiver unit and BTR9 and WFR50 receiver unit are available —sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

Four 4-watt E12 LED bulbs included.

DOWNROD OPTIONS:

Dual mount for flush mount application or 1" dia x 4.5" long downrod. Optional downrods available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 19°. Optional sloped ceiling kits (SCK1-52) are available for slope an angles up to 42°. Optional close-to-ceiling kit is available as well-sold separately. Most sloped ceiling installations require a downrod longer than the standard 4.5" downrod. Call technical support for more information.

LOCATION USE:

Fans are rated for dry locations only.

Available Finishes

| Fan Assembly / Glass | Blades - Traditional |
|-----------------------------------|----------------------------|
| MW – Matte white / Frosted white | Matte white |
| OB – Oil-rubbed bronze / Amber | Cherry / walnut reversible |
| SN – Satin nickel / Frosted white | Cherry / walnut reversible |

Airflow / Energy Efficiency Info (120V)

| Fan Speed | Max RPM | CFM | CFM / Watts | Amps | Watts |
|-----------|---------|------|-------------|------|-------|
| High | 188 | 5897 | 92 | 0.53 | 64 |
| Med | 124 | 3701 | 126 | 0.37 | 29 |
| Low | 65 | 1744 | 171 | 0.21 | 10 |

Energy Guide FTC (Hugger)

| Power (W _{ave}) | Total Air Delivery (CFM _{ave}) | Estimated Yearly Energy Cost (\$) | Ceiling Fan Efficiency (CFM/W) |
|---------------------------|--|-----------------------------------|--------------------------------|
| 30 | 2700 | 8 | 89 |

Energy Guide FTC (Standard)

| Power (W _{ave}) | Total Air Delivery (CFM _{ave}) | Estimated Yearly Energy Cost (\$) | Ceiling Fan Efficiency (CFM/W) |
|---------------------------|--|-----------------------------------|--------------------------------|
| 30 | 2989 | 8 | 99 |

Light Bulb Information (120V)

| Bulb Type | Watts | QTY | Lumens Amount | Color Temp | CRI |
|-----------|-------|-----|---------------|------------|-----|
| LED | 4 | 4 | 1200 | 2700 | 90% |