


BLITZ™

LP8377LBL

(Lowes Item #883778)

LP8377**

56" Ceiling Fan

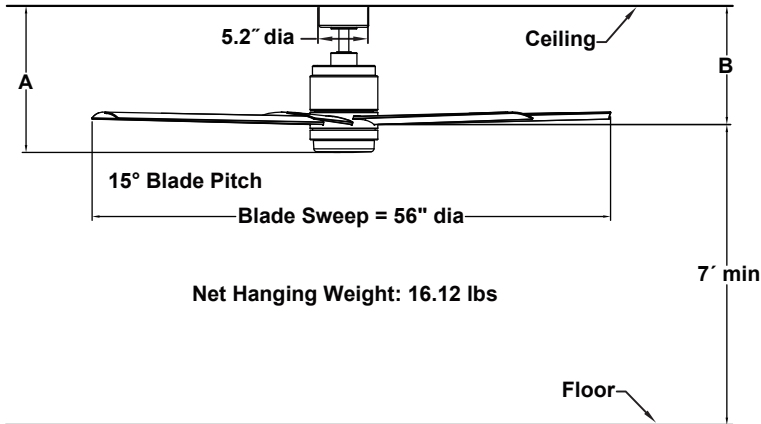

	A	B
Fan w/4.5" downrod	15.44"	12.52"
Fan w/12" downrod	22.94"	20.02"
Fan w/18" downrod	28.94"	26.02"
Fan w/24" downrod	34.94"	32.02"
Fan w/36" downrod	46.94"	44.02"
Fan w/48" downrod	58.94"	56.02"
Fan w/60" downrod	70.94"	68.02"
Fan w/72" downrod	82.94"	80.02"

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

100 x 30 DC motor is designed for optimal performance with this fan. Fan is Energy Star Rated.

BLADES:

A set of seven 26" composite blades is included.

CONTROL OPTIONS:

TR205S hand-held remote control is included. Push button remote control with variable fan speeds, fresh air, reverse, infinite light levels, fan/light timer, home away, safe exit and off button. Optional TW206 wall control is available—sold separately. Instruction is provided with each control.

LIGHTING OPTIONS:

One 18-watt LED included.

DOWNROD OPTIONS:

Fan comes with a 1" Dia. x 4.5" downrod (DRT1-45). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72". For installations requiring a longer downrod, a downrod coupler is available. Fan must use 12" or longer downrod, and can be mounted on a sloped ceiling up to 19°. Optional sloped ceiling kits (SCK1-52) are available for up to 42°. Optional close-to-ceiling kit is available as well—sold separately. Call technical support for more information.

LOCATION USE:

Fan is rated for dry and damp locations.

Available Finishes	
LBL	Black with Black Blade and Opal Frosted Glass/Steel Cap
LBN	Brushed Nickel with Gray Blade and Opal Frosted Glass/Steel Cap
LGR	Matte Greige with Weathered Wood Blade and Opal Frosted Glass/Steel Cap
LMW	Matte White with Matte White Blade and Opal Frosted Glass/Steel Cap

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	136	6407	209	0.41	31
Med	82	3758	595	0.09	6
Low	35	1765	857	0.03	2

Energy Guide FTC			
Power (Watt)	Total Air Delivery (CFMave)	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
22	4035	6	182

Light Bulb Information (120V)					
Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
LED	18	1	1400	3000	90%