




RINGAIRE™

**LP8405LCH
23" Ceiling Fan**

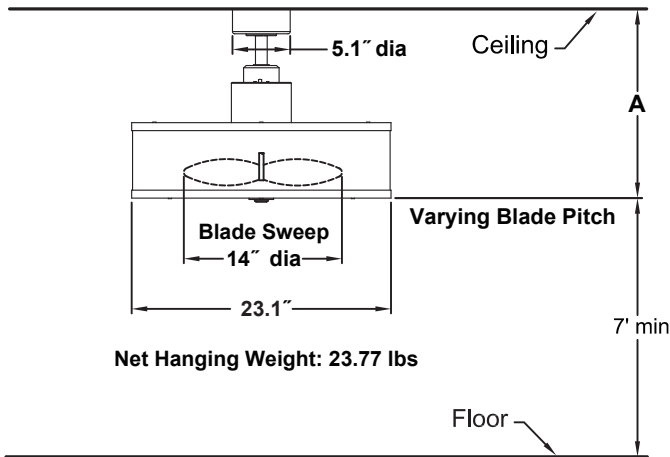

	A
Fan w/4.5" downrod	17.00"
Fan w/12" downrod	24.50"
Fan w/18" downrod	30.50"
Fan w/24" downrod	36.50"
Fan w/36" downrod	48.50"
Fan w/48" downrod	60.50"
Fan w/60" downrod	72.50"
Fan w/72" downrod	84.50"

Available Finishes	
LCH	Chrome with Black Blade

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

82 x 25 AC motor is designed for optimal performance with this fan.

CONTROL OPTIONS:

TR500S hand-held remote control is included. Push button remote control with variable fan speeds, infinite light levels and off button. Optional CW1SW, CW2, CWRL4 and CW60WH wall controls, BTR9 remote control with receiver unit, CRL4WH, C4, CRL8TS hand held remote controls and BTR9 receiver are available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

20-watt LED included.

DOWNROD OPTIONS:

Fan comes with a 1" Dia. x 4.5" downrod (DRT1-45). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72". For installations requiring a longer downrod, a downrod coupler is available. Fan can be mounted on a sloped ceiling up to 19°. Optional close-to-ceiling kit is available as well—sold separately. Optional sloped ceiling kits (SCK1-52) are available for up to 42°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry locations only.

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	1050	1242	31	0.33	40
Med	720	802	32	0.26	25
Low	570	625	33	0.23	19

Energy Guide FTC			
Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
31	953	9	31

Light Bulb Information (120V)				
Bulb Type	Watts	Lumens Amount	Color Temp	CRI
LED	20	2200	3000	90%