


# WINDPOINTE® SERIES

## MA7500\*\* Fan Motor Assembly

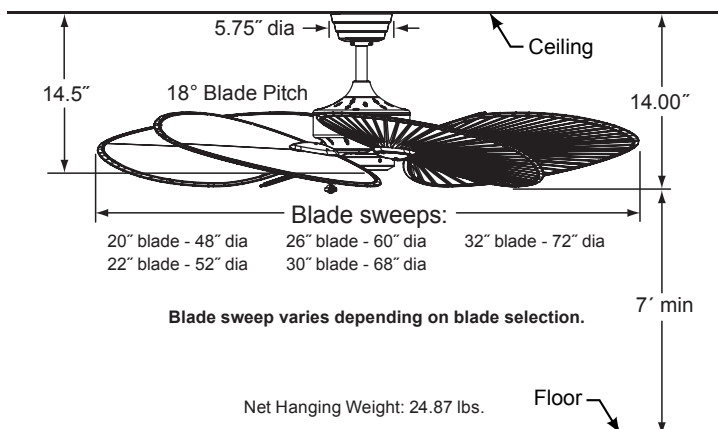

### INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

### ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

### MOTOR SPECS:

188 x 25 AC motor is designed for optimal performance with this fan.

### FAN SPEEDS / BLADES:

3 fan speeds with pull chain and reversing switch (on switch cup housing). Speeds will vary depending on blade size and type. All blade sets are sold separately. See our catalog or visit [www.fanimation.com](http://www.fanimation.com) for available blade options.

### CONTROL OPTIONS:

Optional CW1, CW1SW, CW2, CW5, CWRL4 and CW60WH wall controls and BTCR9, C4, CRL4WH and CRL8TS remote controls and BTR9 receiver unit are available—sold separately.

### LIGHTING OPTIONS:

Optional lighting fitters and light kits are available. See our catalog or visit [www.fanimation.com](http://www.fanimation.com) for lighting options.

### DOWNROD OPTIONS:

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. Fan can be mounted on a sloped ceiling up to 27°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Optional close-to-ceiling kit is available as well—sold separately. Call technical support for more information.

### LOCATION USE:

MA7500AB and MA7500PW are rated for dry locations only. MA7500MW, MA7500OB and MA7500RS are rated for dry and damp locations. Damp location rated with use of woven bamboo or all-weather composite blades.

Available Finishes	
Fan / Housing Assembly	
AB	Antique Brass
MW	Matte White (Damp)
PW	Pewter
OB	Oil-Rubbed Bronze (Damp)
RS	Rust (Damp)

### MA7500 Airflow / Energy Efficiency Info (120V) Airflow measured with B5280 Blades in 52" sweep

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	101	4649	46	0.39	46
Med	117	3748	32	0.33	32
Low	160	2395	15	0.23	15

### Energy Guide FTC Airflow measured with BPW6090 Blades in 60"

Power (W <sub>ave</sub> )	Total Air Delivery (CFM <sub>ave</sub> )	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
33	3845	9	116