
# **HUBBARDTON FORGE® SERIES**

# HF6200\*\* Standard Leaf Fan



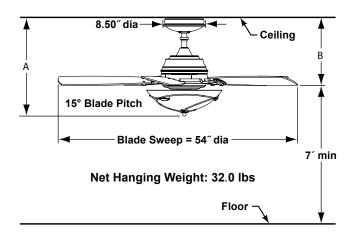

|                   | Α      | В      |  |
|-------------------|--------|--------|--|
| Fan w/6" downrod  | 19.97″ | 13.68″ |  |
| Fan w/12" downrod | 25.97" | 19.68″ |  |
| Fan w/18" downrod | 31.97″ | 25.68" |  |
| Fan w/24" downrod | 37.97″ | 31.68″ |  |
| Fan w/36" downrod | 49.97" | 43.68" |  |
| Fan w/48" downrod | 61.97″ | 55.68" |  |
| Fan w/60" downrod | 73.97″ | 67.68" |  |
| Fan w/72" downrod | 85.97" | 79.68″ |  |

#### **INSTALLA TION REQUIREMENTS:**

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

#### **ELECTRICAL REQUIREMENTS:**

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

#### MOTOR SPECS:

188 x 25 motor is designed for optimal performance with this fan.

### **BLADES:**

A set of five wood blades is included.

| Available Finishes |            |              |       |  |  |
|--------------------|------------|--------------|-------|--|--|
| Model              | Fan Finish | Blade Finish | Glass |  |  |
| HF6200BZ           | Bronze     | Coffee       | Stone |  |  |
| HF6200DS           | Dark Smoke | Slate        | Opal  |  |  |
| HF6200MH           | Mahogany   | Coffee       | Stone |  |  |

| Airflow / Energy Efficiency Info (120V) |         |      |             |      |       |  |  |
|---|---------|------|-------------|------|-------|--|--|
| Fan Speed                               | Max RPM | CFM  | CFM / Watts | Amps | Watts |  |  |
| High                                    | 163     | 5784 | 81          | 0.61 | 72    |  |  |
| Med                                     | 102     | 3470 | 109         | 0.39 | 32    |  |  |
| Low                                     | 64      | 2052 | 136         | 0.26 | 15    |  |  |

## CONTROL OPTIONS:

TR20WH hand-held remote control with wall mount is included. Push button remote control has 3 fan speeds, infinite light levels, reverse and off button. Optional CWRL4 wall control, CRL4WH and CRL8TS hand-held remote control are available—sold separately. Instructions are provided with each control.

#### **LIGHTING OPTIONS:**

Leaf downlight kit with three 40-watt candelabra bulbs is included. Maximum downlight wattage is not to exceed 120 watts.

# **DOWNROD OPTIONS:**

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods available in 12", 18", 24", 36", 48", 60" and 72" lengths. Fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 30° and up to 52°. Optional close-to-ceiling kit is available as well—sold separately. Call technical support for more information.

## **LOCATION USE:**

Fan is dry location rated only. Damp location rated when used with optional all-weather composite blade set (BPW21CF).





All Hubbardton Forge designs, the mark HUBBARDTON FORGE and the design of the tongs are trademarks or registered trademarks of Hubbardton Forge Corporation.