


**ISLANDER® DC**

MAD3250** Ceiling Fan

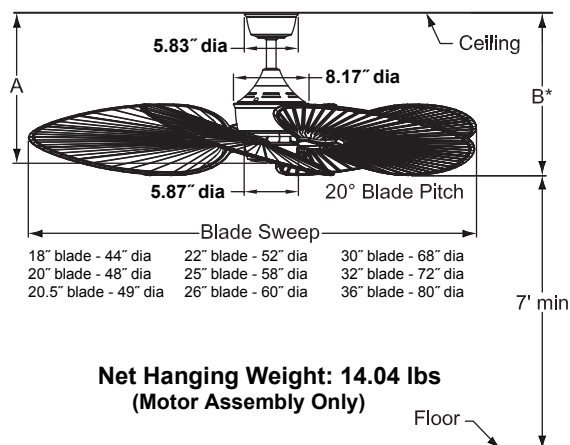

*Dimension when used with ISP1 blades. Ceiling to blade measurement will vary depending on blade.

Available Finishes	
AB	Antique brass
BA	Bronze Accent
PW	Pewter
OB	Oil-rubbed bronze (Damp)

	A	B*
Fan w/6" downrod	16.26"	17.61"
Fan w/12" downrod	22.26"	23.61"
Fan w/18" downrod	28.26"	29.61"
Fan w/24" downrod	34.26"	35.61"
Fan w/36" downrod	46.26"	47.61"
Fan w/48" downrod	58.26"	59.61"
Fan w/60" downrod	70.26"	71.61"
Fan w/72" downrod	82.26"	83.61"

Airflow / Energy Efficiency Info (120V) Airflow measured with B5330 Blade in 52" sweep					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
I	50	2477	550	0.07	5
II	66	3014	486	0.09	6
III	79	3601	357	0.13	10
IV	93	4262	286	0.19	15
V	109	4941	233	0.26	21
VI	121	5412	183	0.36	30

Energy Guide FTC			
Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
21	6668	6	315

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

5

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 1 amp circuit.

MOTOR SPECS:

DC-125S DC motor (hall sensor) is designed for optimal performance with this fan.

BLADES:

5 bladed blade sets are available in palm, bamboo, wood and composite materials—all sold separately. See our catalog or visit www.fanimation.com for blade options.

Note: Fan speeds will vary according to blade set—material, shape and size of blade. In general, smaller blades will turn faster than bigger ones and narrower blades will turn faster than wider ones.

CONTROL OPTIONS:

TR39 hand-held DC fan remote control is included. Push button remote control has 6 fan speeds, infinite light levels, reverse and off button. Optional TW40 wall control is available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

Optional lighting fitters and light kits are available—See our catalog or visit www.fanimation.com for available lighting options.

DOWNROD OPTIONS:

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". The Islander® fan can be mounted on a sloped ceiling up to 27°. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Optional close-to-ceiling kit is available as well- sold separately. Call technical support for more information.

LOCATION USE:

MAD3250AB, MAD3250BA and MAD3250PW are rated for dry locations only. MAD3250OB is rated for dry and damp locations. Damp location rated with use of woven bamboo or all-weather composite blades.