


AKIRA™

FP8000** Ceiling Fan

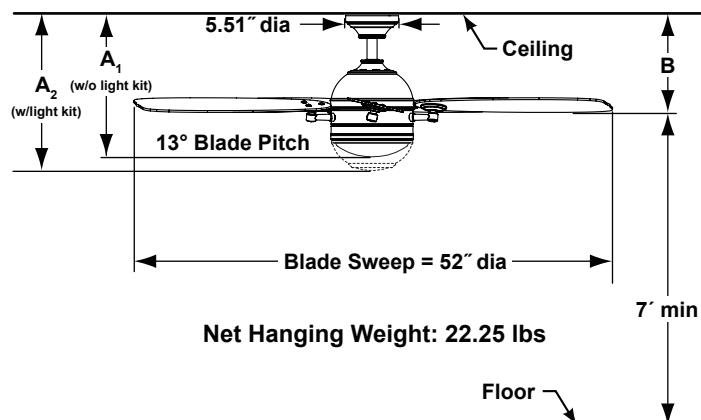

	A ₁	A ₂	B
Fan w/4.5" downrod	14.31"	15.82"	10.12"
Fan w/12" downrod	21.81"	23.32"	17.62"
Fan w/18" downrod	27.81"	29.32"	23.62"
Fan w/24" downrod	33.81"	35.32"	29.62"
Fan w/36" downrod	45.81"	47.32"	41.62"
Fan w/48" downrod	57.81"	59.32"	53.62"
Fan w/60" downrod	69.81"	71.32"	65.62"
Fan w/72" downrod	81.81"	83.32"	77.62"

INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

172 x 20 motor is designed for optimal performance with this fan.

Available Finishes

OB	Oil-Rubbed Bronze with Opal Frosted Glass/Steel Cap
PN	Polished Nickel with Opal Frosted Glass/Steel Cap
SN	Satin Nickel with Opal Frosted Glass/Steel Cap

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	179	5147	83	0.52	62
Med	116	3408	118	0.42	29
Low	66	1939	162	0.30	12

BLADE SETS:

A set of 5 reversible 21.3" wood blades is included. Mahogany/Walnut included with Oil-Rubbed Bronze fan and Cherry/Walnut included with Polished Nickel and Pewter fans.

CONTROL OPTIONS:

TR24WH hand-held remote control with wall mount is included. Push button remote control has 3 fan speeds, infinite light levels and off button. Optional CWRL4 and C25 wall controls, CRL4WH and CRL8TS hand-held remote controls are available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

One bulb (100-watt halogen minican bulb -included) downlight fixture is included with this fan assembly. Maximum downlight wattage not to exceed 100 watts.

DOWNROD OPTIONS:

The Akira™ fan comes with a 1" Dia. x 4.5" downrod. Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer downrod, a downrod coupler is available. The Akira™ fan can be mounted on a sloped ceiling up to 19°. Optional sloped ceiling kits (SCK1-52) are available for slope an angles up to 52°. Most sloped ceiling installations require a downrod longer than the standard 4.5" downrod. Optional close-to-ceiling kit is available as well—sold separately. Call your local dealer for more information.

LOCATION USE:

Fan is rated for dry locations only.