

The Belize[®]

FP2920 Series




SPECIFICATION SHEET



Product Specifications subject to change

The Belize® Fan Assembly – FP2920**

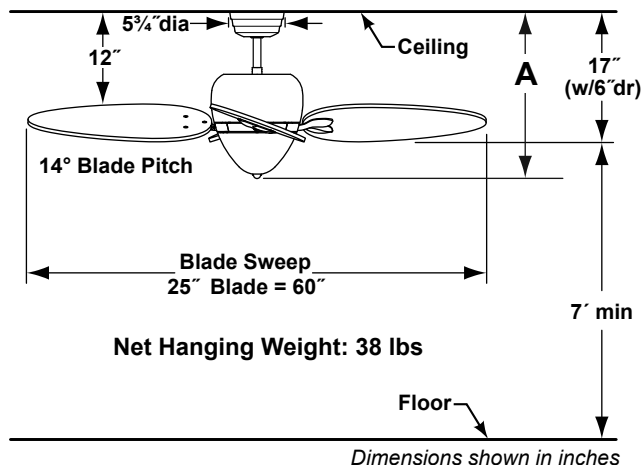

Available Finishes	
AR	Amber Brown
CF	Clear Frosted

Distance from Ceiling to Bottom of Fan	A
Fan w/6" downrod	20 1/4"
Fan w/12" downrod	26 1/4"
Fan w/18" downrod	32 1/4"
Fan w/24" downrod	38 1/4"
Fan w/36" downrod	50 1/4"
Fan w/48" downrod	62 1/4"
Fan w/60" downrod	74 1/4"
Fan w/72" downrod	85 1/4"

INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

FAN SPEEDS:

3 fan speeds with reversing switch (on top of the motor). High – 105 rpm; Med – 75 rpm; Low – 50 rpm

FINISHES:

The glass mosaic housing are available in two finishes; Amber Brown & Clear Frosted. Both have black trim finishes.

CONTROL OPTIONS:

The hand-held remote control (C24) and receiver unit (RECAN68) are included. Push button control with frequency code settings located on both the transmitter and the receiver units. Each push button unit will consist of 3 separate fan speeds, infinite light levels, and off button. Reversing switch located inside top glass on upper socket housing. Installation and operating instructions provided with control. Optional wall control (C25) is available (to be used in conjunction with fan receiver).

LIGHTING OPTIONS:

The 3-bulb (25 watt max) uplight and 2-bulb (15 watt max) downlight fixtures (candelabra bulbs - not included) are included with this fan assembly with a maximum of 170 watts. Maximum wattage including uplight and downlight not to exceed 170 watts.

DOWNROD OPTIONS:

The Belize® fan comes with a standard 6" downrod. Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer downrod, a downrod coupler is available. The Belize® fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB52) are available for up to 52°. Call tech support for more information.

BLADE SETS:

A set of 4 wood blades are included. Not recommended for Damp Location.

DAMP LOCATION:

Fan not rated for Damp Location usage.



10983 Bennett Parkway
Zionsville, IN 46077
Toll Free (888) 567-2055
FAX (866) 482-5215

Outside U.S. call (317) 733-4113
Visit Our Website www.fanimation.com

