


EXTRAORDINAIRE - CW30 Wall Control

SPECIFICATION and INSTRUCTION SHEET

DESCRIPTION: For two extraordinaire fans only, 3-speed slide control.

ELECTRICAL SPECS: 120 volts, 60 hertz, max. Fan load 2.5 amps, 3-wire installation.

FAN MODELS USED: Most fanimation fans - see Catalog or visit our website, www.fanimation.com for more information.

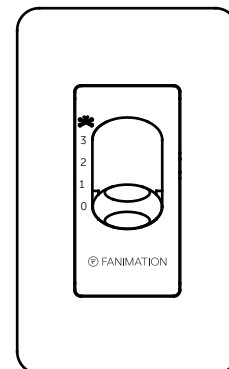

How to Wire and Operate Your CW30 Wall Control

NOTE: If fan or supply wires are different colors than indicated, have this unit installed by a qualified electrician.

1. Installing Wall Control (Figures 1 & 2):

- With electrical power still disconnected, remove the existing wall plate and switch.
- Set the knob and light switch of the wall control in the off (0) position.
- Make wiring connections with wire nuts as shown in Figure 1.
 - One black wire from wall control unit to black (A.C. power supply).
 - One black wire from wall control unit to black wire leading to two ceiling fans.
 - Connect the green/yellow wire from the wall-mounted control with two ceiling fans and ground wire from the A. C. power supply.
- Attach wall control unit to outlet box using the two screws provided. Then, the face plate attaches the wall control. (Figure 2)
- Restore electrical power.



WARNING

To avoid possible fire or shock, make sure that the electrical wires are completely inside the outlet box and not pinched between the wall plate and the wall.



WARNING

Check to see that all connections are tight, including ground, and that no bare wire is visible at the wire connectors, except for the ground wire.

2. Operating & Using Wall Control:

- 3 Slide Switch – low fan speed
- 2 Slide Switch – medium fan speed
- 1 Slide Switch – high fan speed
- 0 Slide Switch – fan off

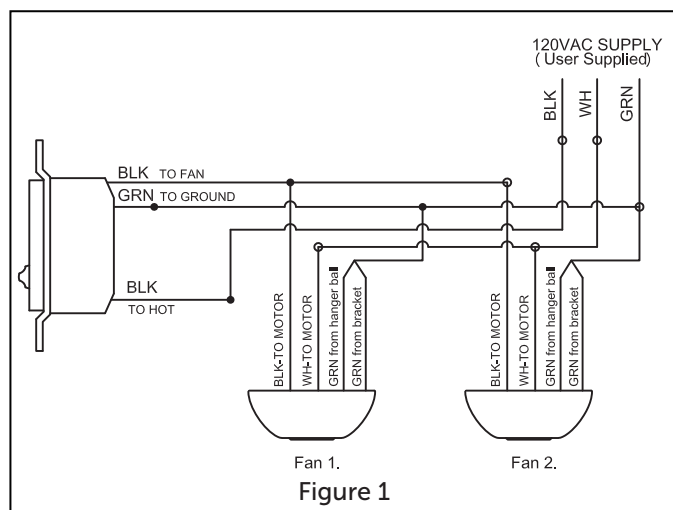


Figure 1

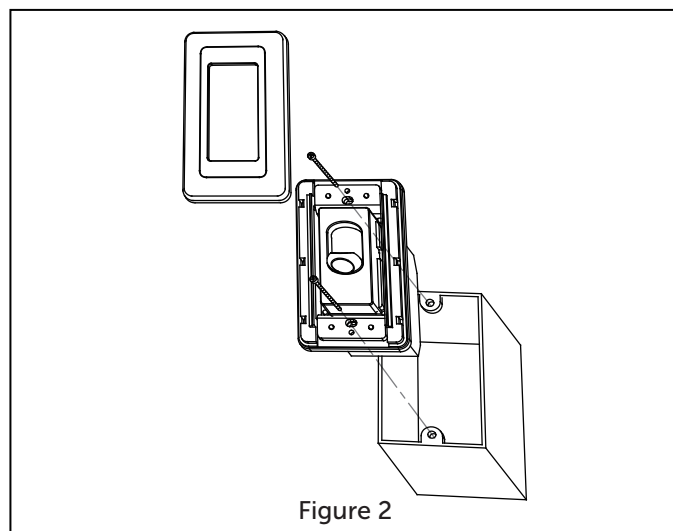


Figure 2



FANIMATION®
SHOWROOM COLLECTION

10983 Bennett Parkway
Zionsville, IN 46077
(888) 567-2055 • FAX (866) 482-5215
Outside U.S. call (317) 733-4113
WWW.FANIMATION.COM

Copyright 2016 Fanimation
2016/02