

The Escalade®

FP2320GZ




SPECIFICATION SHEET



Product Specifications subject to change

The Escalade® Fan Assembly – FP2320GZ

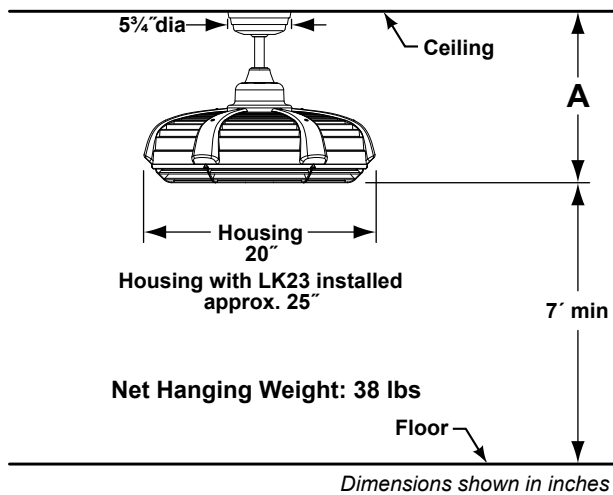

Distance from Ceiling to Bottom of Fan	A
Fan w/6" downrod	16"
Fan w/12" downrod	22"
Fan w/18" downrod	28"
Fan w/24" downrod	34"
Fan w/36" downrod	46"
Fan w/48" downrod	58"
Fan w/60" downrod	70"
Fan w/72" downrod	82"

Available Finish	
GZ	Galvanized (Damp)

INSTALLATION REQUIREMENTS:

Ceiling fan is secured to a structural member such as a ceiling joist and must be capable of withstanding a load of at least 100 pounds. A lag bolt pass through the junction box and into the wood member above.

ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit. 220 VAC, 50 Hz version is available.

FAN SPEEDS:

3-speeds, non-reversing. RPM's: High - 1200; Med - 900; Low - 600

CONTROL OPTIONS:

The hand-held remote control (C8), wall control (C9, includes white faceplate) and canopy-style receiver (REC2320) are all included. Push button control with frequency code settings located on both the transmitter and the receiver units. Each push button unit will consist of 3 separate speeds, up/down light controls, and off button. Installation and operating instructions provided with each control.

LIGHTING OPTIONS:

Optional, perimeter light kit (LK23_) - swivel, six 35 watt, 120 V, dual contact, bayonet style Halogen Bulbs (P/N LB37) with a maximum of 210 watts.

DOWN ROD OPTIONS:

The Escalade® fan comes with a standard 6" down rod. Optional down rods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer down rod, a down rod coupler is available. The Escalade® fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a down rod longer than the standard 6" down rod. Optional sloped ceiling ball kits (SCB52) are available for up to 52°. Call tech support for more information.

DAMP LOCATION:

Fan is rated for Damp Location usage.



10983 Bennett Parkway
Zionsville, IN 46077
Toll Free (888) 567-2055
FAX (866) 482-5215

Outside U.S. call (317) 733-4113
Visit Our Website www.fanimation.com

