


MARIANO™

FP7930PWW Ceiling Fan

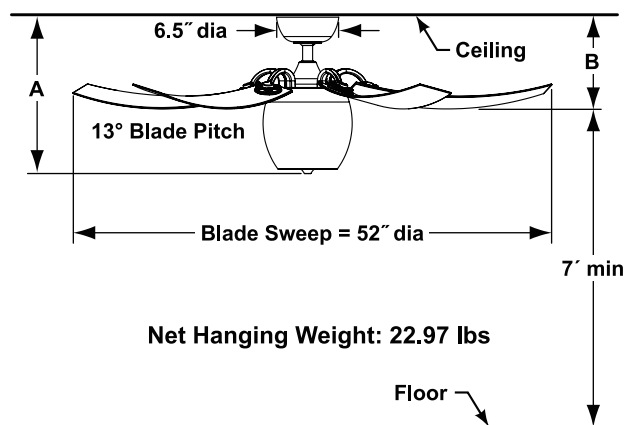

	A	B
Fan w/4.5" downrod	18.95"	9.31"
Fan w/12" downrod	26.45"	16.81"
Fan w/18" downrod	32.45"	22.81"
Fan w/24" downrod	38.45"	28.81"
Fan w/36" downrod	50.45"	40.81"
Fan w/48" downrod	62.45"	52.81"
Fan w/60" downrod	74.45"	64.81"
Fan w/72" downrod	86.45"	76.81"

Available Finishes

PWW	Pewter (DAMP)
-----	---------------

INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

172 x 20 motor is designed for optimal performance with this fan.

BLADE SETS:

A set of five 21" reversible all-weather composite cherry finish curved blades.

CONTROL OPTIONS:

TR24WH hand-held remote control with wall mount is included. Push button remote control has 3 fan speeds, infinite light levels and off button. Optional CWRL4 and C25 wall controls, CRL4WH and CRL8TS hand-held remote controls are available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

The 2-bulb (13 watt max CFL bulbs-included) downlight fixture with white swirl glass is included with this fan assembly. Maximum downlight wattage not to exceed 26 watts.

DOWNROD OPTIONS:

Fan comes with 1" dia. x 4.5" long downrod (DR1-45). Optional downrods available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 4.5" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 30° and up to 52°. Optional close-to-ceiling kit is available as well—sold separately. Call technical support for more information.

LOCATION USE:

Dry and damp location rated only.

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	168	5549	92	0.51	60
Med	106	3439	122	0.42	28
Low	41	1285	132	0.27	10