


STONEHILL™

FP7953CH 52" Ceiling Fan

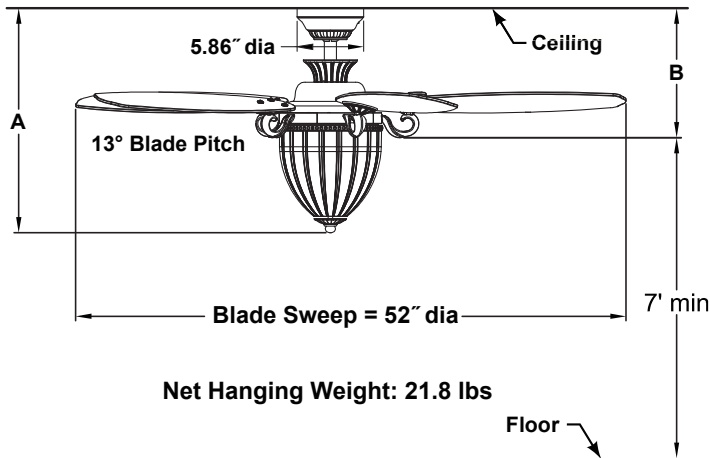

	A	B
Fan w/4.5" downrod	19.71"	11.38"
Fan w/12" downrod	27.21"	18.88"
Fan w/18" downrod	33.21"	24.88"
Fan w/24" downrod	39.21"	30.88"
Fan w/36" downrod	51.21"	42.88"
Fan w/48" downrod	63.21"	54.88"
Fan w/60" downrod	75.21"	66.88"
Fan w/72" downrod	87.21"	78.88"

INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

153 x 20 motor is designed for optimal performance with this fan.

BLADE SETS:

A set of five 21" reversible cherry/walnut plywood blades is included.

CONTROL OPTIONS:

TR24WH hand-held remote control with wall mount is included. Push button remote control has 3 fan speeds, infin light levels and off button. Optional CWRL4 and C25 wall controls, CRL4WH and CRL8TS hand-held remote controls are available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

Three 40-watt candelabra bulbs included. See our catalog or visit www.fanimation.com for available lighting options.

DOWNROD OPTIONS:

Fan comes with 1" dia. x 4.5" long downrod (DR1-45). Optional downrods available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling upto 30°. Most sloped ceiling installations require a downrod longer than the standard 4.5" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 30° and up to 52°. Optional close-to-ceiling kit is available as well—sold separately. Call technical support for more information.

LOCATION USE:

Fan is rated for dry location only.

Available Finish

CH

Chrome with Cherry/Walnut Plywood Blade and Clear Glass

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	156	5314	92	0.50	58
Med	108	3977	128	0.42	31
Low	71	2768	154	0.34	18