
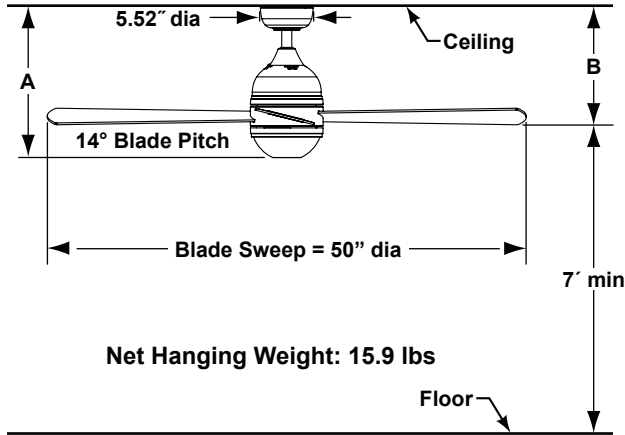


QUATTRO™

FP8050SN Ceiling Fan

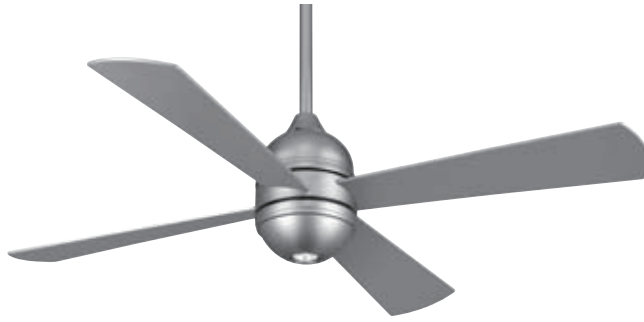

	A	B
Fan w/4.5" downrod	15.67"	12.23"
Fan w/12" downrod	23.17"	19.73"
Fan w/18" downrod	29.17"	25.73"
Fan w/24" downrod	35.17"	31.73"
Fan w/36" downrod	47.17"	43.73"
Fan w/48" downrod	59.17"	55.73"
Fan w/60" downrod	71.17"	67.73"
Fan w/72" downrod	83.17"	79.73"

Available Finishes

SN	Satin nickel with reversible cherry/satin nickel blades
----	---

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

153 x 18 motor is designed for optimal performance with this fan.

BLADES:

A set of four 25" reversible, cherry/satin nickel blades is included.

CONTROL OPTIONS:

TR24WH hand-held remote control with wall mount is included. Push button remote control has 3 fan speeds, infinite light levels and off button. Optional CWRL4 and C25 wall controls, CRL4WH and CRL8TS hand-held remote controls are available—sold separately. Instructions are provided with each control.

LIGHTING OPTION:

Single-bulb downlight fixture with one 50-watt GU10/MR16 halogen bulb is included.

DOWNROD OPTIONS:

Fan comes with a 1" Dia. x 4.5" downrod. Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer downrod, a downrod coupler is available. The QUATTRO™ fan can be mounted on a sloped ceiling up to 19°. Optional sloped ceiling kits (SCK1-52) are available for slope angles up to 52°. Most sloped ceiling installations require a downrod longer than the standard 4.5" downrod. Optional close-to-ceiling kit is available as well—sold separately. Call your local dealer for more information.

LOCATION USE:

Fan is rated for dry locations only.

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	144	4295	93	0.38	46
Med	100	3024	121	0.34	25
Low	57	1652	165	0.24	10