

The Huxley™

FP5620 Series





SPECIFICATION SHEET



Product Specifications Subject To Change

HUXLEY™

FP5620** Ceiling Fan

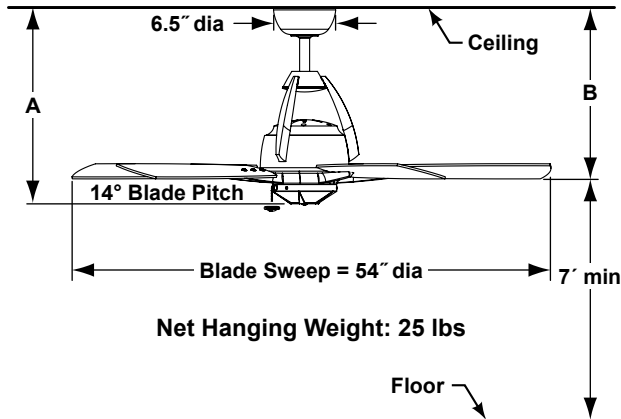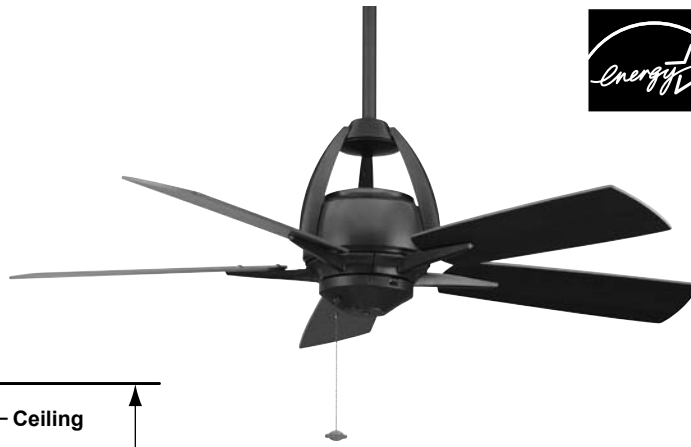

	A	B
Fan w/6" downrod	19.25"	18.75"
Fan w/12" downrod	25.25"	24.75"
Fan w/18" downrod	31.25"	30.75"
Fan w/24" downrod	37.25"	36.75"
Fan w/36" downrod	49.25"	48.75"
Fan w/48" downrod	61.25"	60.75"
Fan w/60" downrod	73.25"	72.75"
Fan w/72" downrod	85.25"	84.75"

INSTALLATION REQUIREMENTS:

Fan requires a minimum ceiling height of 9 feet. Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

188 x 15 motor is designed for optimal performance with this fan.

BLADES:

A set of five reversible cherry/walnut finish wood blades is included.

CONTROL OPTIONS:

Optional C1 and C2 wall controls and C4 remote control with receiver unit are available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

Matching single bowl fixture (LK5620) with three 60-watt candelabra bulbs available (180 watts max.)—sold separately. Also accepts standard lighting fitters and light kits. See our catalog or visit www.fanimation.com for available lighting options.

DOWNROD OPTIONS:

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods available in 12", 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 30° and up to 52°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry locations only.

Available Finishes

OB	Oil-rubbed bronze
PW	Pewter



Optional Opal Frosted
Light Kit

LK5620

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	175	5529	89	0.52	62
Med	129	3967	112	0.39	35
Low	78	2293	161	0.25	14



Copyright 2010 Fanimation, Inc.

**10983 Bennett Parkway
Zionsville, IN 46077
Toll Free (888) 567-2055
FAX (866) 482-5215
Outside U.S. call (317) 733-4113
Visit Our Website www.fanimation.com**



2010/01