




**COPPER LAKE™**

# LP7942LBZ

## 52" Ceiling Fan

Lowes Item #459544

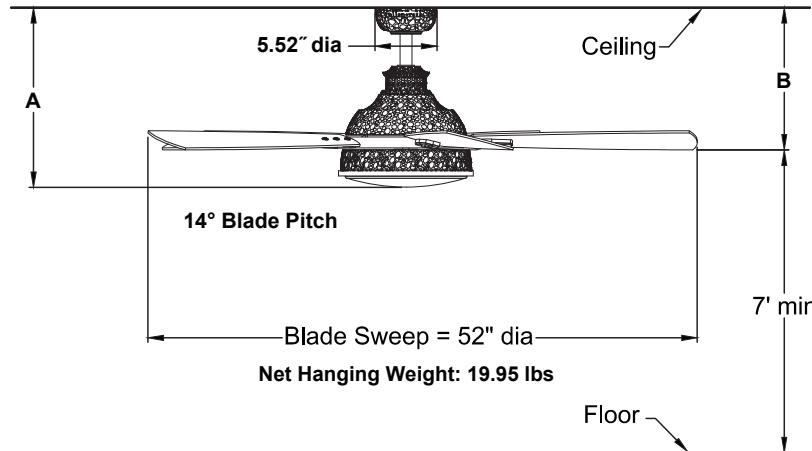

	A	B
Fan w/ 6" downrod	16.02"	12.69"
Fan w/12" downrod	22.02"	18.69"
Fan w/18" downrod	28.02"	24.69"
Fan w/24" downrod	34.02"	30.69"
Fan w/36" downrod	46.02"	42.69"
Fan w/48" downrod	58.02"	54.69"
Fan w/60" downrod	70.02"	66.69"
Fan w/72" downrod	82.02"	78.69"

### INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

### ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

### MOTOR SPECS:

172 x 20 motor is designed for optimal performance with this fan.

### BLADES:

A set of five 20" reversible blades is included.

### CONTROL OPTIONS:

TR350AR hand-held remote control is included. Push button remote control has 3 fan speeds, infinite light levels and off button.

### LIGHTING OPTIONS:

One 100-watt halogen minican bulb included.

### DOWNROD OPTIONS:

Fan comes with a 1"dia. x 6" long downrod (DRT1-6). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. For installations requiring a longer downrod, a downrod coupler is available. Fan can be mounted on a sloped ceiling up to 19°. Call technical support for more information.

### LOCATION USE:

Fan is rated for dry location only.

### Available Finishes

Fan / Housing Assembly		Blades
BZ	Bronze	Cherry/Walnut Blade with Opal Frosted Glass

### Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	151	5055	78	0.54	65
Med	107	3335	91	0.47	37
Low	55	2066	159	0.31	13