


SOUTHLAKE™

LP8055LAZ

52" Ceiling Fan

Lowes Item #331104

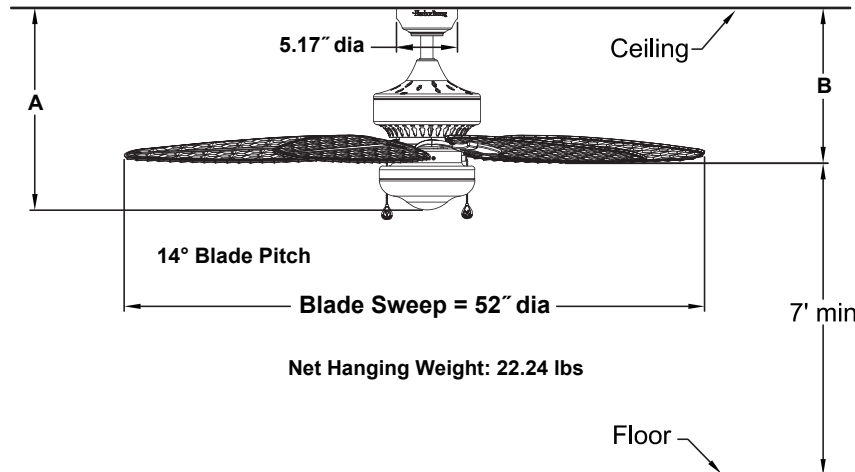

| | A | B |
|--------------------|--------|--------|
| Fan w/4.5" downrod | 17.17" | 13.18" |
| Fan w/12" downrod | 24.67" | 20.68" |
| Fan w/18" downrod | 30.67" | 26.68" |
| Fan w/24" downrod | 36.67" | 32.68" |
| Fan w/36" downrod | 48.67" | 44.68" |
| Fan w/48" downrod | 60.67" | 56.68" |
| Fan w/60" downrod | 72.67" | 68.68" |
| Fan w/72" downrod | 84.67" | 80.68" |

Available Finishes

| Fan / Housing Assembly | | Blades |
|------------------------|-------------|---|
| AZ | Aged Bronze | Antique Composite Blade with Opal Frosted Glass |

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

172 x 20 motor is designed for optimal performance with this fan.

BLADES:

A set of five 22" antique composite blades is included.

LIGHTING OPTIONS:

One 100-watt halogen minican bulb included.

DOWNROD OPTIONS:

Fan comes with a 1" Dia. x 4.5" downrod (DRT1-45). Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer downrod, a downrod coupler is available. Fan can be mounted on a sloped ceiling up to 19°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry and damp locations.

Airflow / Energy Efficiency Info (120V)

| Fan Speed | Max RPM | CFM | CFM / Watts | Amps | Watts |
|-----------|---------|------|-------------|------|-------|
| High | 168 | 5988 | 88 | 0.57 | 68 |
| Med | 111 | 4072 | 127 | 0.40 | 32 |
| Low | 60 | 2314 | 210 | 0.23 | 11 |