




ELEVATION™

LP8071LBN 52" Ceiling Fan Lowes Item #72028

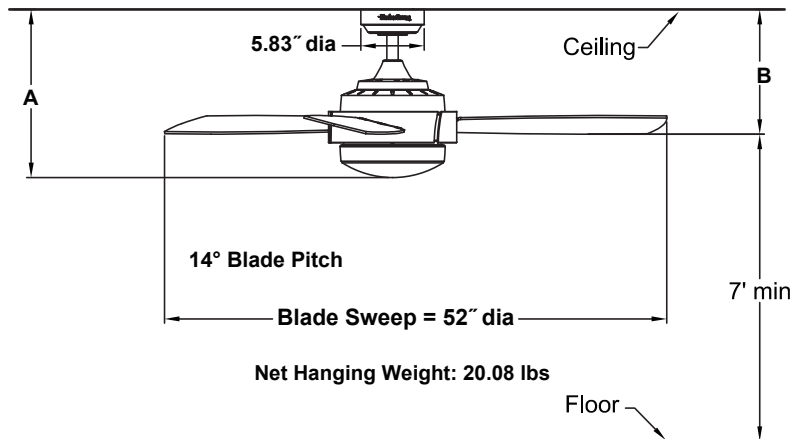

	A	B
Fan w/4.5" downrod	15.45"	11.46"
Fan w/12" downrod	22.95"	18.96"
Fan w/18" downrod	28.95"	24.96"
Fan w/24" downrod	34.95"	30.96"
Fan w/36" downrod	46.95"	42.96"
Fan w/48" downrod	58.95"	54.96"
Fan w/60" downrod	70.95"	66.96"
Fan w/72" downrod	82.95"	78.96"

Available Finishes

Fan / Housing Assembly		Blades
BN	Brushed Nickel	Cherry/Walnut Blade with Opal Frosted Glass

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	186	5932	87	0.58	68
Med	120	3785	127	0.39	30
Low	51	1645	191	0.20	9

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

172 x 17 motor is designed for optimal performance with this fan.

BLADES:

A set of three 21" reversible blades is included.

CONTROL OPTIONS:

TR350L hand-held remote control is included. Push button remote control has 3 fan speeds, infinite light levels and off button.

LIGHTING OPTIONS:

One 100-watt halogen minican bulb included.

DOWNROD OPTIONS:

Fan comes with a 1" Dia. x 4.5" downrod (DRT1-45). Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer downrod, a downrod coupler is available. Fan can be mounted on a sloped ceiling up to 19°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry location only.