




FREEPORT™

LP8072LAZ

52" Ceiling Fan

Lowes Item #68717

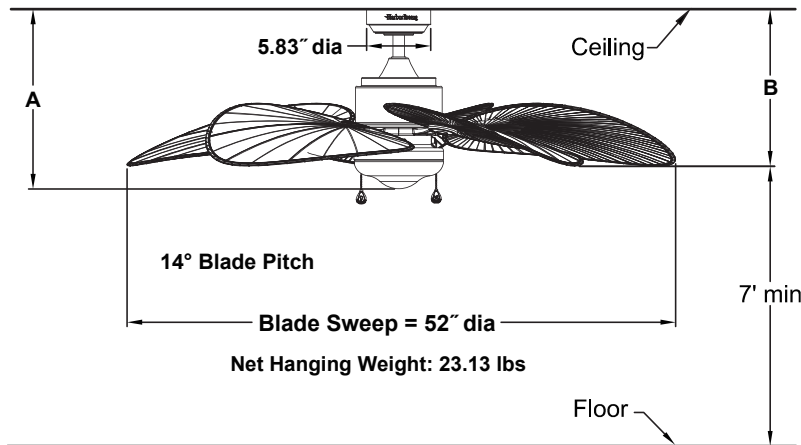

	A	B
Fan w/4.5" downrod	16.33"	14.26"
Fan w/12" downrod	23.83"	21.76"
Fan w/18" downrod	29.83"	27.76"
Fan w/24" downrod	35.83"	33.76"
Fan w/36" downrod	47.83"	45.76"
Fan w/48" downrod	59.83"	57.76"
Fan w/60" downrod	71.83"	69.76"
Fan w/72" downrod	83.83"	81.76"

Available Finishes

Fan / Housing Assembly		Blades
AZ	Aged Bronze	Natural Palm Composite Blade with Opal Frosted Glass

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

172 x 20 motor is designed for optimal performance with this fan.

BLADES:

A set of five 21" natural palm composite blades is included.

LIGHTING OPTIONS:

One 100-watt halogen minican bulb included.

DOWNROD OPTIONS:

Fan comes with a 1" Dia. x 4.5" downrod (DRT1-45). Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer downrod, a downrod coupler is available. Fan can be mounted on a sloped ceiling up to 19°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry and damp locations.

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	159	5217	87	0.51	60
Med	116	3975	117	0.39	34
Low	63	2152	196	0.22	11