




EASTVIEW™

LP8074LAZ 23" Ceiling Fan Lowes Item #331091

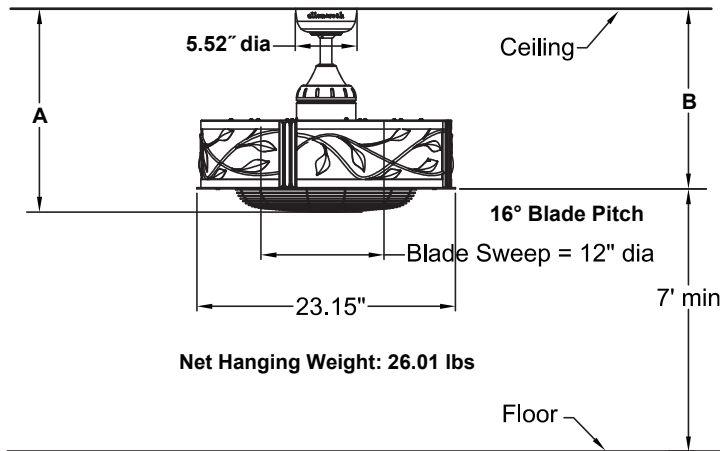

	A	B
Fan w/4.5" downrod	18.21"	16.13"
Fan w/12" downrod	25.71"	23.63"
Fan w/18" downrod	31.71"	29.63"
Fan w/24" downrod	37.71"	35.63"
Fan w/36" downrod	49.71"	47.63"
Fan w/48" downrod	61.71"	59.63"
Fan w/60" downrod	73.71"	71.63"
Fan w/72" downrod	85.71"	83.63"

Available Finishes

AZ Aged Bronze with Cream Shade

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

82 x 25 motor is designed for optimal performance with this fan.

CONTROL OPTIONS:

TR350AR hand-held remote control is included. Push button remote control has 3 fan speeds, infinite light levels and off button.

LIGHTING OPTIONS:

Four 40-watt candelabra base bulbs included.

DOWNROD OPTIONS:

Fan comes with a 1" Dia. x 4.5" downrod (DRT1-45). Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer downrod, a downrod coupler is available. Fan can be mounted on a sloped ceiling up to 19°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry location only.

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	1560	1062	19	0.47	56
Med	947	806	30	0.35	27
Low	652	545	30	0.29	18