


DEXTER™

LP8076LBN

28" Ceiling Fan

Lowes Item #331102

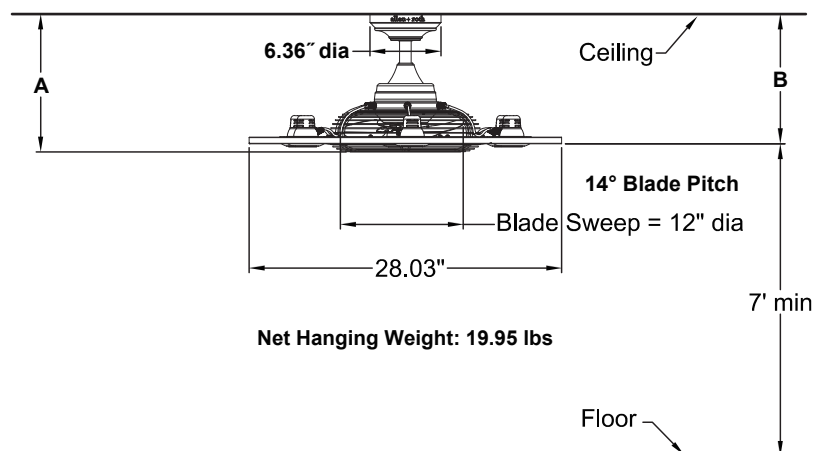

	A	B
Fan w/4.5" downrod	12.37"	11.63"
Fan w/12" downrod	19.87"	19.13"
Fan w/18" downrod	25.87"	25.13"
Fan w/24" downrod	31.87"	31.13"
Fan w/36" downrod	43.87"	43.13"
Fan w/48" downrod	55.87"	55.13"
Fan w/60" downrod	67.87"	67.13"
Fan w/72" downrod	79.87"	79.13"

Available Finishes

BN	Brushed Nickel with Cinnamon Fixture Frame
----	--

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

90 x 25 motor is designed for optimal performance with this fan.

FAN SPEEDS:

High—1,442 rpm; Med—1,150 rpm; Low—990 rpm

CONTROL OPTIONS:

TR350AR hand-held remote control is included. Push button remote control has 3 fan speeds, infinite light levels and off button.

LIGHTING OPTIONS:

Fan assembly features 6 downlights (GU10 base MR-16 bulbs, 25 watt max - included). Maximum downlight wattage not to exceed 150 watts.

DOWNROD OPTIONS:

Fan comes with a 1" Dia. x 4.5" downrod (DRT1-45). Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer downrod, a downrod coupler is available. Fan can be mounted on a sloped ceiling up to 19°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry location only.

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	1442	1134	38	0.26	30
Med	1150	955	46	0.28	21
Low	990	828	49	0.27	17