


QUIMBY™

LP8078LAZ

52" Ceiling Fan

Lowes Item #331101

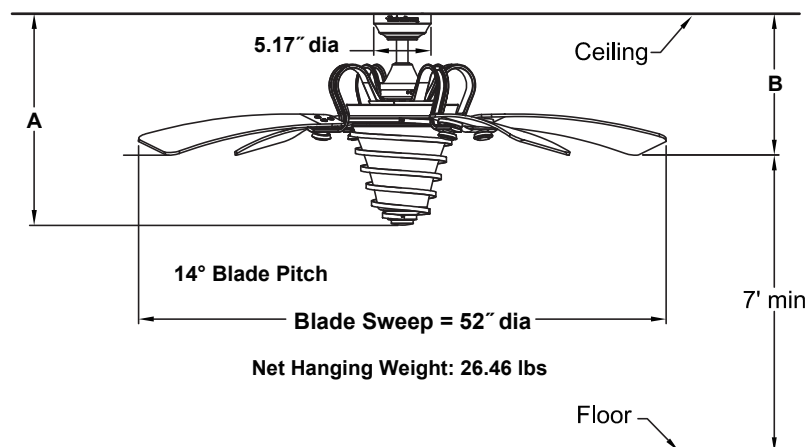

	A	B
Fan w/4.5" downrod	19.13"	12.78"
Fan w/12" downrod	26.63"	20.28"
Fan w/18" downrod	32.63"	26.28"
Fan w/24" downrod	38.63"	32.28"
Fan w/36" downrod	50.63"	44.28"
Fan w/48" downrod	62.63"	56.28"
Fan w/60" downrod	74.63"	68.28"
Fan w/72" downrod	86.63"	80.28"

Available Finishes

Fan / Housing Assembly		Blades
AZ	Aged Bronze	Cherry with Amber Swirl Glass

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	143	5043	81	0.52	63
Med	100	3609	112	0.38	32
Low	54	2029	166	0.23	12

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

172 x 20 motor is designed for optimal performance with this fan.

BLADES:

A set of four 19" plywood blades is included.

CONTROL OPTIONS:

TR350 hand-held remote control is included. Push button remote control has 3 fan speeds, infinite light levels and off button.

LIGHTING OPTIONS:

Three 40-watt candelabra bulbs included.

DOWNROD OPTIONS:

Fan comes with a 1" Dia. x 4.5" downrod (DRT1-45). Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer downrod, a downrod coupler is available. Fan can be mounted on a sloped ceiling up to 19°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry location only.