
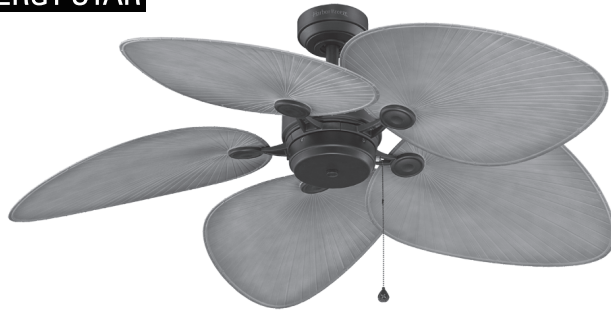


**FREEPORT™**

LP8079LAZ 52" Ceiling Fan Lowes Item #204534

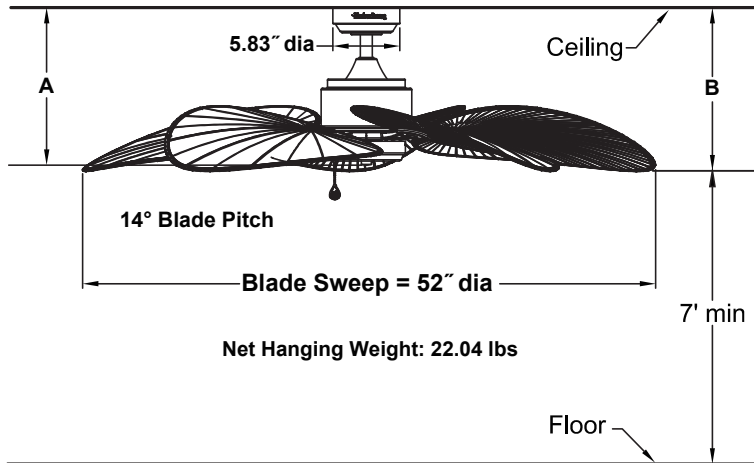

	A	B
Fan w/4.5" downrod	13.71"	14.18"
Fan w/12" downrod	21.21"	21.68"
Fan w/18" downrod	27.21"	27.68"
Fan w/24" downrod	33.21"	33.68"
Fan w/36" downrod	45.21"	45.68"
Fan w/48" downrod	57.21"	57.68"
Fan w/60" downrod	69.21"	69.68"
Fan w/72" downrod	81.21"	81.68"

Available Finishes

Fan / Housing Assembly		Blades
AZ	Aged Bronze	Natural Palm Composite Blade

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	158	5500	93	0.50	59
Med	126	4109	117	0.39	35
Low	70	2197	183	0.22	12

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

172 x 20 motor is designed for optimal performance with this fan. Fan is Energy Star Rated.

BLADES:

A set of five 21" natural palm composite blades is included.

DOWNROD OPTIONS:

Fan comes with a 1" Dia. x 4.5" downrod (DRT1-45). Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer downrod, a downrod coupler is available. Fan can be mounted on a sloped ceiling up to 19°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry and damp locations.