




HIGHLANDER™

LP8115LAZ 52" Ceiling Fan Lowes Item #356999

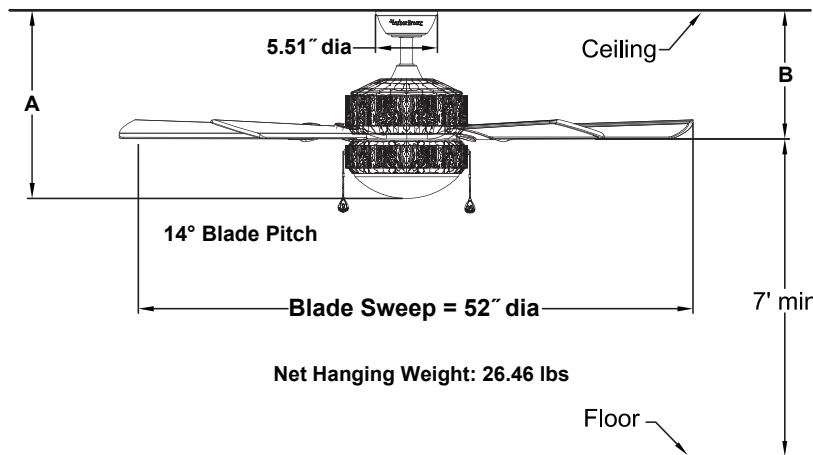

| | A | B |
|--------------------|--------|--------|
| Fan w/4.5" downrod | 16.73" | 11.44" |
| Fan w/12" downrod | 24.23" | 18.94" |
| Fan w/18" downrod | 30.23" | 24.94" |
| Fan w/24" downrod | 36.23" | 30.94" |
| Fan w/36" downrod | 48.23" | 42.94" |
| Fan w/48" downrod | 60.23" | 54.94" |
| Fan w/60" downrod | 72.23" | 66.94" |
| Fan w/72" downrod | 84.23" | 78.94" |

Available Finishes

| Fan / Housing Assembly | | Blades |
|------------------------|-------------|--------------------------------------|
| AZ | Aged Bronze | Natural Pine with Opal Frosted Glass |

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

172 x 17 motor is designed for optimal performance with this fan.

BLADES:

A set of five 19" solid wood blades is included.

LIGHTING OPTIONS:

One 100-watt halogen minican bulb included.

DOWNROD OPTIONS:

Fan comes with a 1" Dia. x 4.5" downrod (DRT1-45). Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer downrod, a downrod coupler is available. Fan can be mounted on a sloped ceiling up to 19°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry location only.

Airflow / Energy Efficiency Info (120V)

| Fan Speed | Max RPM | CFM | CFM / Watts | Amps | Watts |
|-----------|---------|------|-------------|------|-------|
| High | 155 | 5731 | 96 | 0.50 | 60 |
| Med | 92 | 3515 | 160 | 0.31 | 22 |
| Low | 50 | 1871 | 267 | 0.18 | 7 |