




LE MARCHE™

LP8130LBN 56" Ceiling Fan Lowes Item #199985

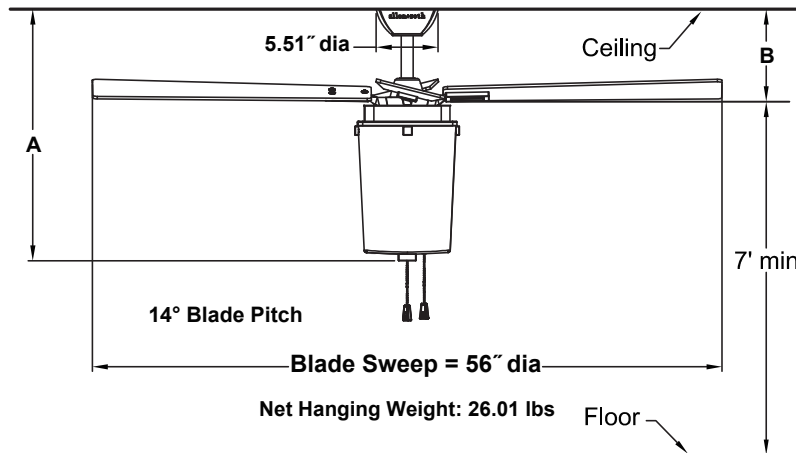

	A	B
Fan w/ 6" downrod	22.39"	8.24"
Fan w/12" downrod	28.39"	14.24"
Fan w/18" downrod	34.39"	20.24"
Fan w/24" downrod	40.39"	26.24"
Fan w/36" downrod	52.39"	38.24"
Fan w/48" downrod	64.39"	50.24"
Fan w/60" downrod	76.39"	62.24"
Fan w/72" downrod	88.39"	74.24"

Available Finishes

Fan / Housing Assembly		Blades
BN	Brushed Nickel	Cherry/Maple Blade with Linen White Glass

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

172 x 20 motor is designed for optimal performance with this fan.

BLADES:

A set of four 25" reversible blades is included.

LIGHTING OPTIONS:

Two 18-watt GU24 base CFL bulbs included.

DOWNROD OPTIONS:

Fan comes with a 1" Dia. x 6" downrod (DRT1-6). Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer downrod, a downrod coupler is available. Fan can be mounted on a sloped ceiling up to 19°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry location only.

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	154	5795	91	0.54	64
Med	95	3714	138	0.36	27
Low	57	2273	207	0.22	11