




LP8146LBN

72" Ceiling Fan

Lowes Item #198689

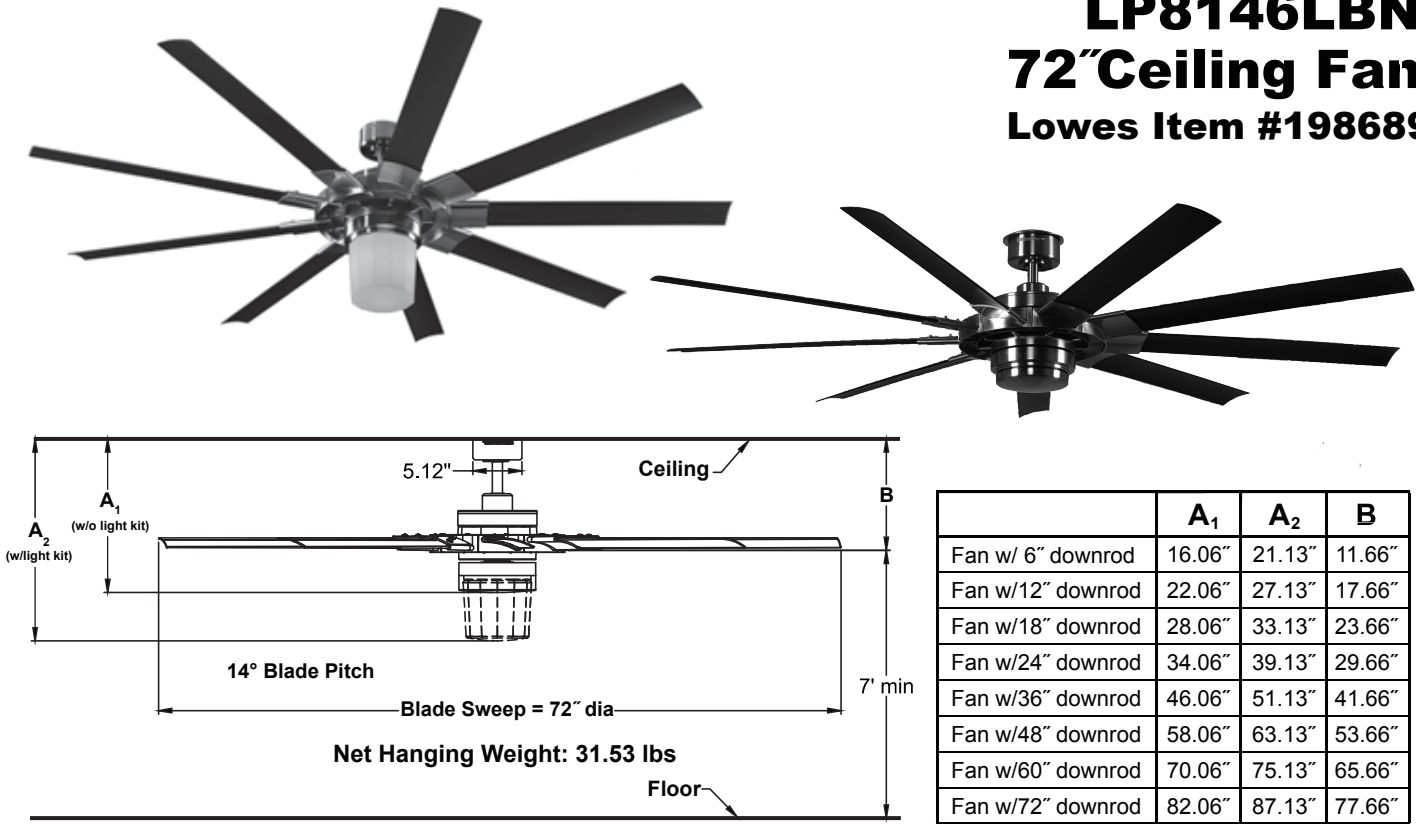

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

DC-165M DC motor is designed for optimal performance with this fan. Fan is Energy Star Rated.

BLADES:

A set of nine 29" composite blades is included.

CONTROL OPTIONS:

TR29WH hand-held DC fan remote control is included. Push button remote control has 6 fan speeds, ON/OFF light levels, reverse and off button.

LIGHTING OPTIONS:

One 32-watt GU-24 base CFL bulb included.

DOWNROD OPTIONS:

Fan comes with a 1" Dia. x 6" downrod (DRT1-6). Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer downrod, a downrod coupler is available. Fan can be mounted on a sloped ceiling up to 19°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry locations only.

Available Finishes		
Fan / Housing Assembly		Blades
BN	Brushed Nickel	Black with Opal Frosted Glass / Steel Cap

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
I	51	5601	676	0.17	8.3
II	57	6136	562	0.22	10.9
III	64	6782	467	0.28	14.5
IV	69	7464	407	0.34	18.4
V	75	8067	342	0.42	23.6
VI	83	8885	293	0.52	30.4