




**SANTA ANA™**

# LP8150LBN

## 48" Ceiling Fan

Lowes Item #357002

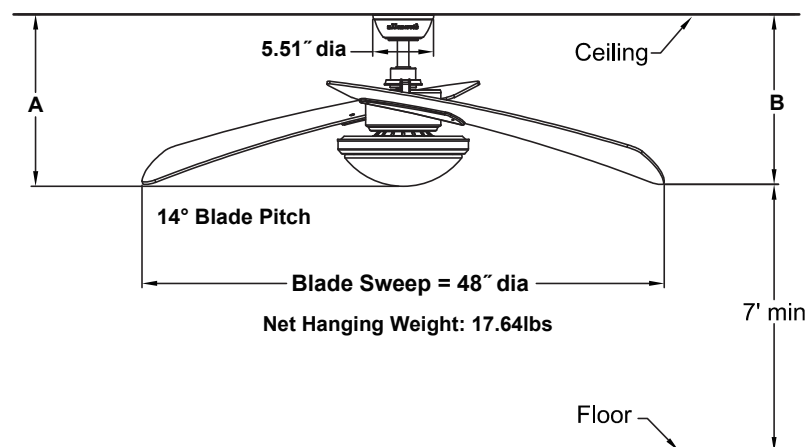

	A	B
Fan w/ 6" downrod	15.59"	15.41"
Fan w/12" downrod	21.59"	21.41"
Fan w/18" downrod	27.59"	27.41"
Fan w/24" downrod	33.59"	33.41"
Fan w/36" downrod	45.59"	45.41"
Fan w/48" downrod	57.59"	57.41"
Fan w/60" downrod	69.59"	69.41"
Fan w/72" downrod	81.59"	81.41"

### Available Finishes

Fan / Housing Assembly		Blades
BN	Brushed Nickel	Walnut with Opal Frosted Glass

### INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

### ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

### MOTOR SPECS:

153 x 15 motor is designed for optimal performance with this fan.

### BLADES:

A set of two 32" plywood blades is included.

### CONTROL OPTIONS:

TR360LAR hand-held remote control is included. Push button remote control has 4 fan speeds, infinite light levels and off button.

### LIGHTING OPTIONS:

One 100-watt halogen minican bulb included.

### DOWNROD OPTIONS:

Fan comes with a 1" dia. x 6" long downrod (DRT1-6). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. For installations requiring a longer downrod, a downrod coupler is available. Fan can be mounted on a sloped ceiling up to 19°. Call technical support for more information.

### LOCATION USE:

Fan is rated for dry location only.

### Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	159	4577	93	0.42	49
Med	114	3344	124	0.36	27
Med Low	87	2470	154	0.30	16
Low	57	1578	175	0.24	9