


CHENNAI™

LP8200LBN

52" Ceiling Fan

Lowes Item #396792

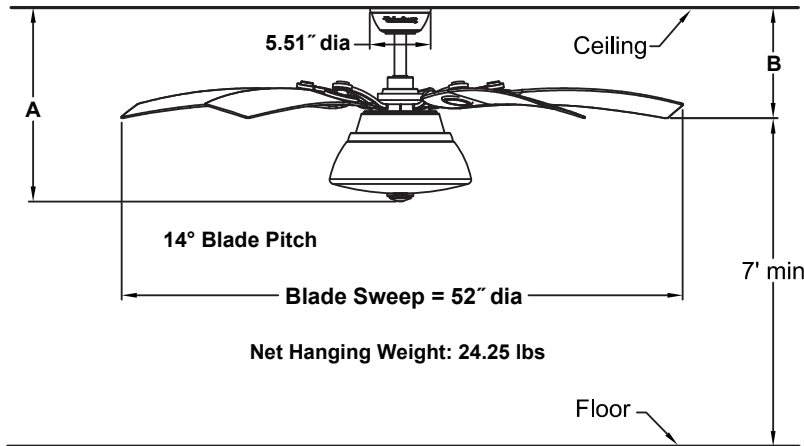

	A	B
Fan w/ 6" downrod	17.56"	10.01"
Fan w/12" downrod	23.56"	16.01"
Fan w/18" downrod	29.56"	22.01"
Fan w/24" downrod	35.56"	28.01"
Fan w/36" downrod	47.56"	40.01"
Fan w/48" downrod	59.56"	52.01"
Fan w/60" downrod	71.56"	64.01"
Fan w/72" downrod	83.56"	76.01"

Available Finishes

Fan / Housing Assembly		Blades
BN	Brushed Nickel	Cherry Composite Blade with Opal Frosted Glass

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	170	5688	100	0.49	57
Med	106	3562	132	0.41	27
Low	45	1611	161	0.27	10

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

172 x 20 motor is designed for optimal performance with this fan.

BLADES:

A set of five 21" cherry composite blades is included.

CONTROL OPTIONS:

TR350 hand-held remote control is included. Push button remote control has 3 fan speeds, infinite light levels and off button.

LIGHTING OPTIONS:

Three 40-watt candelabra bulbs included.

DOWNROD OPTIONS:

Fan comes with a 1" Dia. x 4.5" downrod (DRT1-45). Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer downrod, a downrod coupler is available. Fan can be mounted on a sloped ceiling up to 19°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry location only.