


SAN LEANDRO™

LP8206LAZ

52" Ceiling Fan

Lowes Item #396796

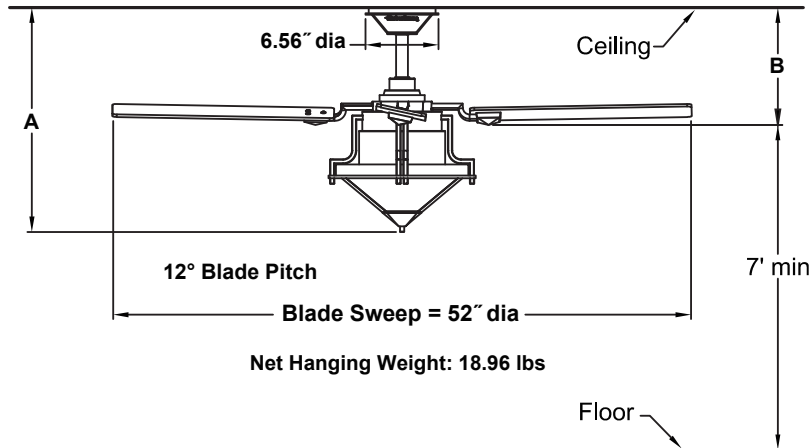

	A	B
Fan w/ 6" downrod	20.13"	10.53"
Fan w/12" downrod	26.13"	16.53"
Fan w/18" downrod	32.13"	22.53"
Fan w/24" downrod	38.13"	28.53"
Fan w/36" downrod	50.13"	40.53"
Fan w/48" downrod	62.13"	52.53"
Fan w/60" downrod	74.13"	64.53"
Fan w/72" downrod	86.13"	76.53"

Available Finishes

Fan / Housing Assembly		Blades
AZ	Aged Bronze	Cherry/Walnut Blade with Tiffany Glass

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	183	5154	91	0.49	57
Med	122	3489	140	0.39	25
Low	61	1870	223	0.25	8

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

153 x 18 motor is designed for optimal performance with this fan.

BLADES:

A set of four 20" reversible blades is included.

CONTROL OPTIONS:

TR350 hand-held remote control is included. Push button remote control has 3 fan speeds, infinite light levels and off button.

LIGHTING OPTIONS:

Two 75-watt halogen minican bulbs included.

DOWNROD OPTIONS:

Fan comes with a 1"dia. x 6" long downrod (DRT1-6). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. For installations requiring a longer downrod, a downrod coupler is available. Fan can be mounted on a sloped ceiling up to 19°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry location only.