




**ROCK HALL™**

**LP8210LAZ**

**52" Ceiling Fan**

**Lowes Item #232645**

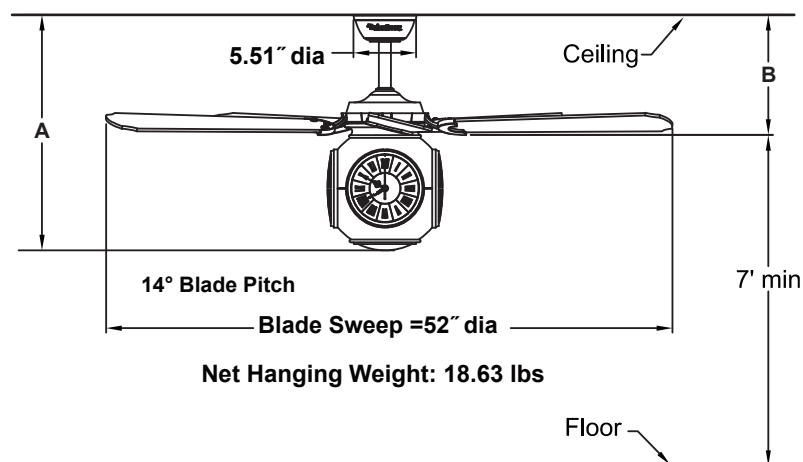

	A	B
Fan w/ 6" downrod	20.71"	10.57"
Fan w/12" downrod	26.71"	16.57"
Fan w/18" downrod	32.71"	22.57"
Fan w/24" downrod	38.71"	28.57"
Fan w/36" downrod	50.71"	40.57"
Fan w/48" downrod	62.71"	52.57"
Fan w/60" downrod	74.71"	64.57"
Fan w/72" downrod	86.71"	76.57"

**INSTALLATION REQUIREMENTS:**

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

**ELECTRICAL REQUIREMENTS:**

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

**MOTOR SPECS:**

DC-125S DC motor is designed for optimal performance with this fan.

**BLADES:**

A set of five 21" reversible blades is included.

**CONTROL OPTIONS:**

TR29WH hand-held DC fan remote control is included. Push button remote control has 6 fan speeds, ON/OFF light levels, reverse and off button.

**LIGHTING OPTIONS:**

One 23-watt E-27 base CFLs bulbs included.

**DOWNROD OPTIONS:**

Fan comes with a 1"dia. x 6" long downrod (DRT1-6). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. For installations requiring a longer downrod, a downrod coupler is available. Fan can be mounted on a sloped ceiling up to 19°. Call technical support for more information.

**LOCATION USE:**

Fan is rated for dry locations only

Available Finishes		
Fan / Housing Assembly		Blades
AZ	Aged Bronze	Cherry/Walnut Blade with Clock and Frosted White Glass

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
I	52	1962	491	0.06	4
II	76	2754	459	0.09	6
III	100	3510	390	0.14	9
IV	124	4300	269	0.22	16
V	148	5003	250	0.28	20
VI	176	5823	182	0.40	32