


PIER 39™

LP8214LBN

52" Ceiling Fan

Lowes Item #232870

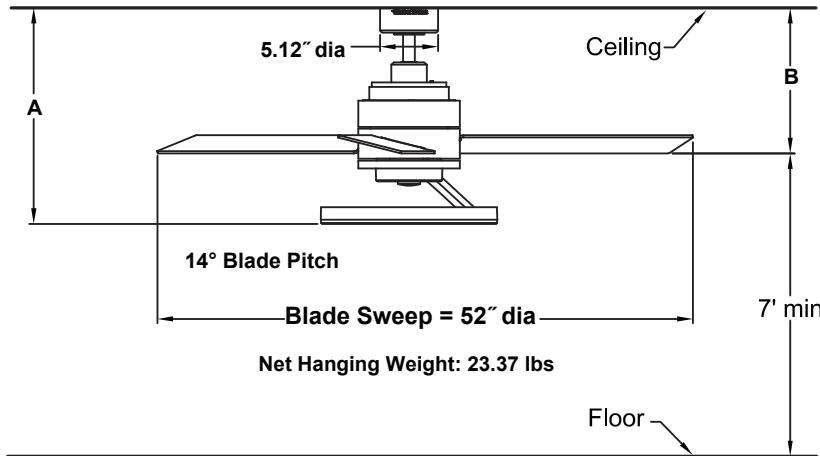

	A	B
Fan w/4.5" downrod	19.11"	12.87"
Fan w/12" downrod	26.61"	20.37"
Fan w/18" downrod	32.61"	26.37"
Fan w/24" downrod	38.61"	32.37"
Fan w/36" downrod	50.61"	38.37"
Fan w/48" downrod	62.61"	50.37"
Fan w/60" downrod	74.61"	62.37"
Fan w/72" downrod	86.61"	74.37"

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

172 x 14 motor is designed for optimal performance with this fan.

BLADES:

A set of three 23" reversible blades is included.

CONTROL OPTIONS:

TR350L hand-held remote control is included. Push button remote control has 3 fan speeds, ON/OFF light levels and off button.

LIGHTING OPTIONS:

30-watt Cree LED included.

DOWNROD OPTIONS:

Fan comes with a 1" Dia. x 4.5" downrod (DRT1-45). Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer downrod, a downrod coupler is available. Fan can be mounted on a sloped ceiling up to 19°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry location only.

Available Finishes

Fan / Housing Assembly		Blades
BN	Brushed Nickel	Cherry/Walnut Blade with LED light kit

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	176	5071	82	0.52	62
Med	105	3346	139	0.32	24
Low	63	2027	187	0.21	11