


VICTORIA HARBOR™

LP8242LCH

52" Ceiling Fan

Lowes Item #233061

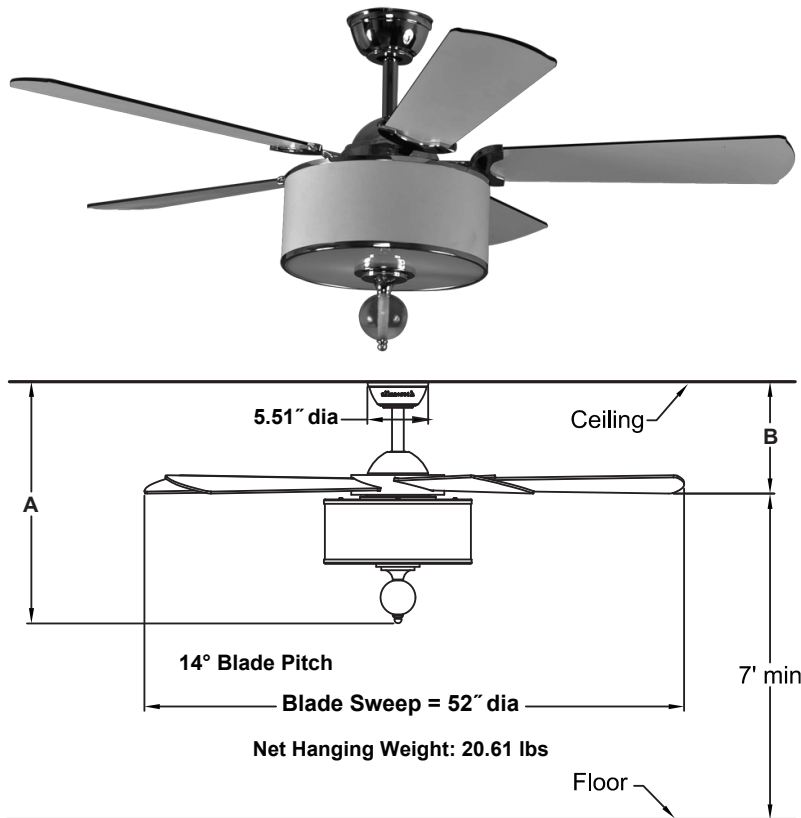

	A	B
Fan w/ 6" downrod	21.89"	10.14"
Fan w/12" downrod	27.89"	16.14"
Fan w/18" downrod	33.89"	22.14"
Fan w/24" downrod	39.89"	28.14"
Fan w/36" downrod	51.89"	40.14"
Fan w/48" downrod	63.89"	52.14"
Fan w/60" downrod	75.89"	64.14"
Fan w/72" downrod	87.89"	76.14"

Available Finishes

Fan / Housing Assembly		Blades
CH	Chrome	Walnut/Black Blade with Ivory Fabric Shade

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	170	5910	88	0.58	67
Med	120	4320	123	0.50	35
Low	69	2395	200	0.32	12

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

172 x 17 motor is designed for optimal performance with this fan.

BLADES:

A set of five 24" reversible blades is included.

CONTROL OPTIONS:

TR350AR hand-held remote control is included. Push button remote control has 3 fan speeds, infinite light levels and off button.

LIGHTING OPTIONS:

Three 40-watt candelabra bulbs included.

DOWNROD OPTIONS:

Fan comes with a 1" dia. x 6" long downrod (DRT1-6). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. For installations requiring a longer downrod, a downrod coupler is available. Fan can be mounted on a sloped ceiling up to 19°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry location only.