


**Santa Ana™**

LP8294LBN

48" Ceiling Fan

Lowes Item #464466

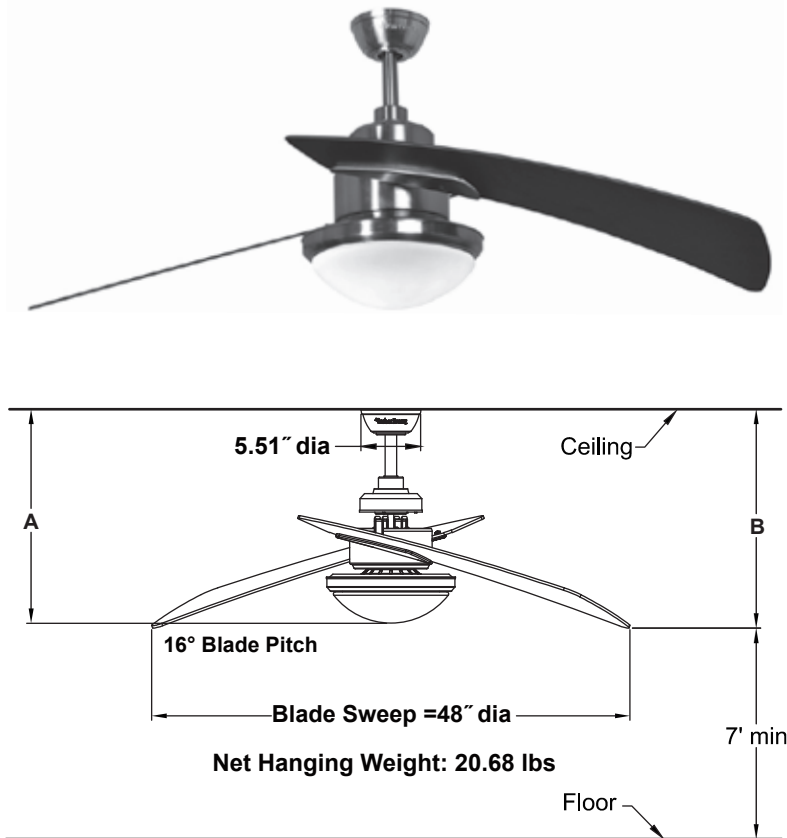

	A	B
Fan w/ 6" downrod	19.78"	19.24"
Fan w/12" downrod	25.78"	25.24"
Fan w/18" downrod	31.78"	31.24"
Fan w/24" downrod	37.75"	37.24"
Fan w/36" downrod	49.78"	49.24"
Fan w/48" downrod	61.78"	61.24"
Fan w/60" downrod	73.78"	73.24"
Fan w/72" downrod	85.78"	85.24"

Available Finishes

Fan / Housing Assembly		Blades
BN	Brushed Nickel	Dark Walnut Blade with Opal Frosted Glass

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
I	51	1450	906	0.02	2
II	73	2059	936	0.04	2
III	98	2741	618	0.06	4
IV	121	3135	348	0.11	9
V	146	3833	348	0.16	11
VI	164	5719	336	0.23	17

Energy Guide FTC

Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
13	3593	4	284

Light Bulb Information (120V)

Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
minican	100	1	1600	2750	99%

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

DC 177 sensorless DC motor is designed for optimal performance with this fan.

BLADES:

A set of two 32" plywood blades is included.

CONTROL OPTIONS:

TR17 hand-held DC fan remote control is included. Push button remote control has 6 fan speeds, infinite light levels, reverse, walk away light delay, home shield, sleep timer and off button.

LIGHTING OPTIONS:

One 100-watt minican bulb included.

DOWNROD OPTIONS:

Fan comes with a 1"dia. x 6" long downrod (DRT1-6). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. For installations requiring a longer downrod, a downrod coupler is available. Fan can be mounted on a sloped ceiling up to 19°. Optional close-to-ceiling kit is available as well—sold separately. Optional sloped ceiling kits (SCK1-52) are available for up to 42°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry locations only.