


**ANIVA BAY™**

# LP8321LAZ

## 52" Ceiling Fan

Lowes Item #593755

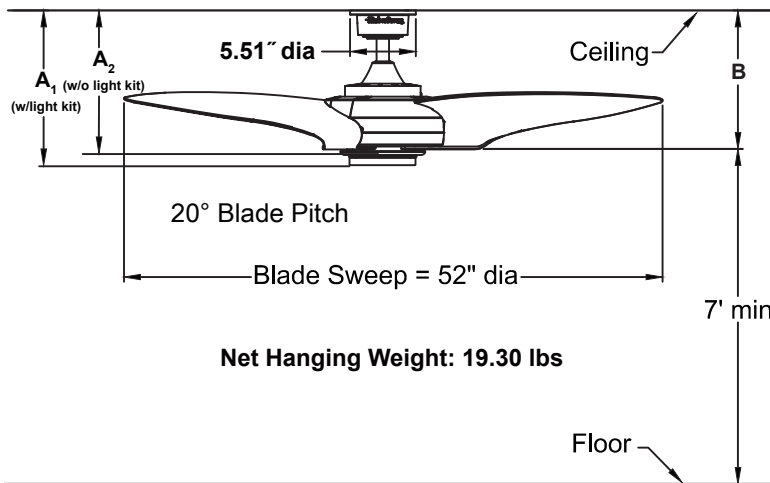

### INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

### ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

### MOTOR SPECS:

DC-177 DC motor is designed for optimal performance with this fan.

### BLADES:

A set of three 24" plastic blades is included.

### CONTROL OPTIONS:

TR17 hand-held DC fan remote control is included. Push button remote control has 6 fan speeds, ON/OFF dimmer light levels, reverse, walk away light delay, home shield, sleep timer and off button.

### LIGHTING OPTIONS:

One 18-watt dimmable LED included. The light kit (Item #0618000, sold separately).

### DOWNROD OPTIONS:

Fan comes with a 1" Dia. x 4.5" downrod (DRT1-45). Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer downrod, a downrod coupler is available. Fan can be mounted on a sloped ceiling up to 19°. Call technical support for more information.

### LOCATION USE:

Fan is rated for dry and damp locations.

	A <sub>1</sub>	A <sub>2</sub>	B
Fan w/4.5" downrod	13.75"	12.25"	11.75"
Fan w/12" downrod	21.25"	19.75"	19.75"
Fan w/18" downrod	27.25"	25.75"	25.75"
Fan w/24" downrod	33.25"	31.75"	31.75"
Fan w/36" downrod	45.25"	43.75"	43.75"
Fan w/48" downrod	57.25"	55.75"	55.75"
Fan w/60" downrod	69.25"	67.75"	67.75"
Fan w/72" downrod	81.25"	79.75"	79.75"

### Available Finishes

Fan / Housing Assembly		Blades
AZ	Aged Bronze	Natural Blade with Opal Frosted Glass

### Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
I	51	1429	952	0.031	2
II	74	2407	1003	0.048	2
III	97	3390	753	0.076	5
IV	121	4183	523	0.133	8
V	145	4999	391	0.215	13
VI	171	5605	286	0.33	20

### Light Bulb Information (120V)

Bulb Type	Watts	Lumens Amount	Color Temp	CRI
LED	18	1300	3000	80%