

The Mavrik™

FP6510 Series




SPECIFICATION SHEET



Product Specifications subject to change

The Mavrik™ Fan Assembly – FP6510**

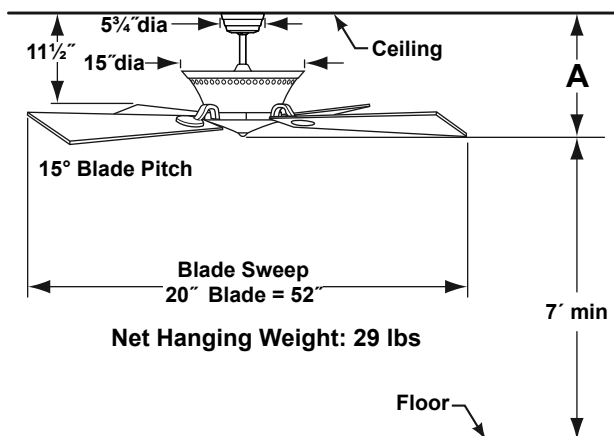

Dimensions shown in inches

Available Finishes	
BG	Burgundy Faux Leather with Brushed Brass Trim / Mahogany Blades
CR	Crocodile Embossed Faux Leather with Chrome Trim / Cherry Blades

Distance from Ceiling to Edge of Blade	A
Fan w/6" downrod	16"
Fan w/12" downrod	22"
Fan w/18" downrod	28"
Fan w/24" downrod	34"
Fan w/36" downrod	46"
Fan w/48" downrod	58"
Fan w/60" downrod	70"
Fan w/72" downrod	82"

INSTALLATION REQUIREMENTS:

Ceiling fan must be attached to electrical junction box securely anchored and capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

FAN SPEEDS:

4 fan speeds with reversing switch (on top of the motor). High – 150 rpm; Med-Hi – 100 rpm; Med – 70 rpm; Low – 40 rpm

CONTROL OPTIONS:

The 3-wire C27 dual-slide fan & light wall control is included. Reversing switch located on top of fan housing. Optional control is a C4 hand-held remote control with canopy receiver. Installation and operating instructions provided with control. Installation and operating instructions provided with control.

LIGHTING OPTIONS:

The built-in uplight fixture accepts 3-60 watt candelabra bulbs (not included). Maximum uplight wattage not to exceed 180 watts. Fan is NOT down light adaptable.

DOWN ROD OPTIONS:

The Mavrik™ fan comes with a standard 6" down rod. Optional down rods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer down rod, a down rod coupler is available. The Mavrik™ fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a down rod longer than the standard 6" down rod. Optional sloped ceiling ball kits (SCB52) are available for up to 52°. Call tech support for more information.

BLADE SET:

Set of 4 wood blades are included with this fan. Not recommended for Damp Location.

DAMP LOCATION:

Fan not rated for Damp Location usage.



**10983 Bennett Parkway
Zionsville, IN 46077
Toll Free (888) 567-2055
FAX (866) 482-5215**

Outside U.S. call (317) 733-4113

Visit Our Website www.fanimation.com

