

**PETREL™**


# MAD7602\*\* Ceiling Fan



REJUVENATION

CHANGE FOR THE  
BETTER WITH  
ENERGY STAR**Available Finishes****Fan / Housing Assembly**

BL	Black
BN	Brushed Nickel
RMW	Matte White

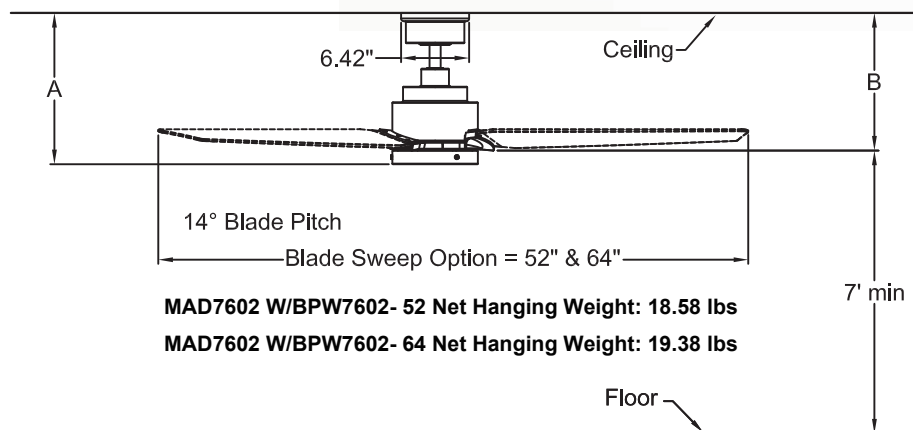

MAD7602 W/BPW7602- 52 Net Hanging Weight: 18.58 lbs

MAD7602 W/BPW7602- 64 Net Hanging Weight: 19.38 lbs

	A	B
Fan w/4.5" downrod	13.65"	12.37"
Fan w/12" downrod	21.15"	19.87"
Fan w/18" downrod	27.15"	25.87"
Fan w/24" downrod	33.15"	31.87"
Fan w/36" downrod	45.15"	43.87"
Fan w/48" downrod	57.15"	55.87"
Fan w/60" downrod	69.15"	67.87"
Fan w/72" downrod	81.15"	79.87"

**INSTALLATION REQUIREMENTS:**

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

**ELECTRICAL REQUIREMENTS:**

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

**MOTOR SPECS:**

158 x 22 sensorless DC motor is designed for optimal performance with this fan.

**BLADES:**

A set of three 22" and 28" plastic blades—sold separately

**CONTROL OPTIONS:**

TR205DRJ hand-held remote control is included. Push button remote control with 16 fan speeds, fresh air, reverse, infinite light levels, fan/light timer, home away, safe exit and off button. Optional TW206D wall control is available—sold separately. Instruction is provided with each control.

**LIGHTING OPTIONS:**

One 18-watt dimmable LED.

**DOWNROD OPTIONS:**

Fan comes with 1" dia. x 4.5" long downrod (DR1-45). Optional downrods available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 19°. Most sloped ceiling installations require a downrod longer than the standard 4.5" downrod. Optional sloped hanger ball kits (SCB1-52) is available for slope angles greater than 19° and up to 32°. Call technical support for more information.

**LOCATION USE:**

Fan is rated for dry and damp locations.

**Airflow / Energy Efficiency Info (Downrod Configuration)  
test with BPW7602-64 Blade in 64" sweep**

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High (16 <sup>th</sup> )	164	7567	200	0.51	38
Med (9 <sup>th</sup> )	100	4555	518	0.14	9
Low (1 <sup>th</sup> )	27	749	340	0.04	2

**Airflow / Energy Efficiency Info (Snugger Configuration)  
test with BPW7602-64 Blade in 64" sweep**

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High (16 <sup>th</sup> )	156	1629	46	0.48	36
Med (9 <sup>th</sup> )	96	931	110	0.14	9
Low (1 <sup>th</sup> )	27	159	76	0.04	2

**Energy Guide FTC (Downrod Configuration)  
Measured with BPW7602-64 Blade in 64" sweep**

Power (W <sub>ave</sub> )	Total Air Delivery (CFM <sub>ave</sub> )	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
24	5260	7	221

**Energy Guide FTC (Snugger Configuration)  
Measured with BPW7602-64 Blade in 64" sweep**

Power (W <sub>ave</sub> )	Total Air Delivery (CFM <sub>ave</sub> )	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
24	2189	7	93

**Light Bulb Information (120V)**

Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
LED	18	1	1500	3000	90%