


SUBTLE™ 72

FPD6236B** 72" Ceiling Fan

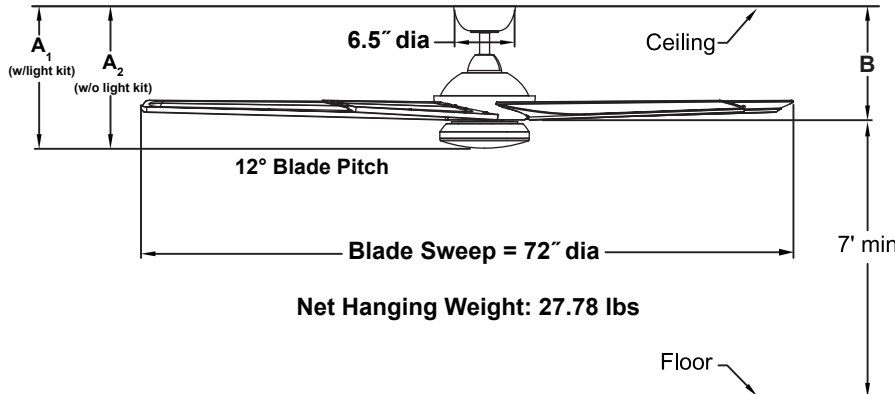

	A ₁	A ₂	B
Fan w/4.5" downrod	14.63"	14.63"	11.90"
Fan w/12" downrod	22.13"	22.13"	19.40"
Fan w/18" downrod	28.13"	28.13"	25.40"
Fan w/24" downrod	34.13"	34.13"	31.40"
Fan w/36" downrod	46.13"	46.13"	43.40"
Fan w/48" downrod	58.13"	58.13"	55.40"
Fan w/60" downrod	70.13"	70.13"	67.40"
Fan w/72" downrod	82.13"	82.13"	79.40"

Available Finishes

BN	Brushed Nickel with bourbon Blade and Opal Frosted Glass / Steel Cap
DZ	Dark Bronze with bourbon Blade and Opal Frosted Glass / Steel Cap
GR	Matte Greige with Weathered Wood Blade and Opal Frosted Glass / Steel Cap

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

158 x 22 sensorless DC motor is designed for optimal performance with this fan.

BLADES:

A set of five 33" blades in plastic with aluminum trim materials.

CONTROL OPTIONS:

TR205D hand-held remote control is included. Push button remote control with 16 fan speeds, fresh air, reverse, infinite light levels, fan/light timer, home away, safe exit and off button. Optional TW206D wall control is available — sold separately. Instructions are provide with each control.

LIGHTING OPTIONS:

One 18-watt dimmable LED.

DOWNROD OPTIONS:

Fan comes with 1" dia. x 4.5" long downrod (DR1-45). Optional downrods available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 27°. Most sloped ceiling installations require a standard 18" downrod or longer downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry and damp locations. This fan is for room over 400 sq ft.

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High (16 th)	94	5090	140	0.56	36
Med (9 th)	64	3297	332	0.16	10
Low (1 th)	29	941	399	0.05	2

Light Bulb Information (120V)

Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
LED	18	1	1500	3000	90%

Energy Guide FTC

Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
23	3361	6	148