



### **AIREFLUSH™**

# LP6804LBL (Lowes Item #5127882) 52" Ceiling Fan



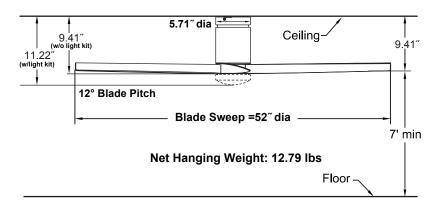

## Ceiling Bracket Width of the screw slot



#### **INSTALLATION REQUIREMENTS:**

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

#### **ELECTRICAL REQUIREMENTS:**

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

#### **MOTOR SPECS:**

100 x 30 DC motor is designed for optimal performance with this fan.

#### **BLADE SET:**

A set of four 25" composite blades is included.

#### **CONTROL OPTIONS:**

TR305S hand-held remote control is included. Push button remote control with 16 fan speeds, fresh air, reverse, ON/OFF dimmer light levels, CCT Select (correlated color temperature selection), fan/light timer, home away, safe exit and off button. Optional TW306 wall control is available — sold separately. Instructions is provided with each control.

Available Finishes					
LBL	Black with Black Blade and Opal Frosted Glass / Steel Cap				

Airflow / Energy Efficiency Info (120V)							
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts		
High (16 <sup>th</sup> )	166	5809	218	0.40	27		
Med (9 <sup>th</sup> )	103	3442	524	0.11	7		
Low (1 <sup>th</sup> )	29	866	328	0.05	3		

Energy Guide FTC							
Power (W <sub>ave</sub> ) Total Air Delivery (CFM <sub>ave</sub> )		Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)				
18	3493	5	193				

Lighting Information (120V)							
Light Bulb	Lumens Amount	I Color Lemn		CRI	Shade/Glass type		
16W CCT LED	1500	468/489/492	Warm/Natural/Cool	90%	Opal Frosted		

#### **LIGHTING OPTIONS:**

One 16-watt CCT LED (Warm/Natural/Cool) included.

#### **LOCATION USE:**

Fan is rated for dry and damp locations. This fan is for room up to 400 sq ft.