


**AIREDROP™**  
**PULL CHAIN**

**LP7654LBL**  
(Lowes Item #900746)  
**52" Ceiling Fan**

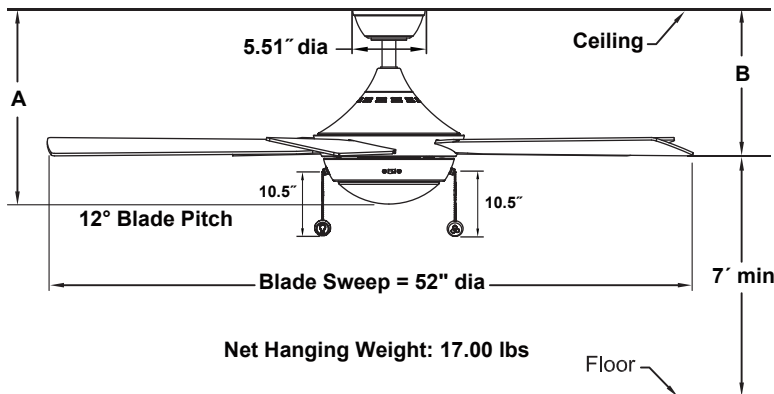

**INSTALLATION REQUIREMENTS:**

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

**ELECTRICAL REQUIREMENTS:**

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

**MOTOR SPECS:**

153 x 20 AC motor is designed for optimal performance with this fan.

**BLADES:**

A set of five 22" plywood blades is included.

**CONTROL OPTIONS:**

Three fan speeds pull chain control included. The reverse switch is located on the switch housing. Optional WC2WH, WR501WH and CWRL4 wall controls, BTR9, CRL4WH and CR500 remote controls, BTR9 receiver unit and WFR50 WiFi receiver unit are available — sold separately. Instructions are provided with each control.

**LIGHTING OPTIONS:**

One 18-watt LED included.  
ON/OFF and dimmable pull chain control.

**DOWNROD OPTIONS:**

Fan comes with a 1" Dia. x 4.5" downrod (DRT1-45). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72". Fan can be mounted on a sloped ceiling up to 19°. Most sloped ceiling installations require a standard 12" downrod or longer downrod. Optional close-to-ceiling kit is available as well — sold separately. Optional sloped ceiling kits (SCK1-52) are available for up to 42°. Call technical support for more information.

**LOCATION USE:**

Fan is rated for dry location only. This fan is for room up to 400 sq ft.

	A	B
Fan w/4.5" downrod	14.95"	11.25"
Fan w/12" downrod	22.45"	18.75"
Fan w/18" downrod	28.45"	24.75"
Fan w/24" downrod	34.45"	30.75"
Fan w/36" downrod	46.45"	42.75"
Fan w/48" downrod	58.45"	54.75"
Fan w/60" downrod	70.45"	66.75"
Fan w/72" downrod	82.45"	78.75"

**Available Finishes**

LBL

Black with Black Blade and  
Opal Frosted Shade

**Airflow / Energy Efficiency Info (120V)**

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	172	4929	76	0.54	64
Med	115	3331	109	0.37	31
Low	66	1905	170	0.22	11

**Energy Guide FTC**

Power (W <sub>ave</sub> )	Total Air Delivery (CFM <sub>ave</sub> )	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
39	4100	11	104

**Lighting Information (120V)**

Light Bulb	Lumens Amount	Delivered Lumens	Color Temp	CRI	Shade/Glass type
18W LED	1500	842	3000	90%	Opal Frosted